


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

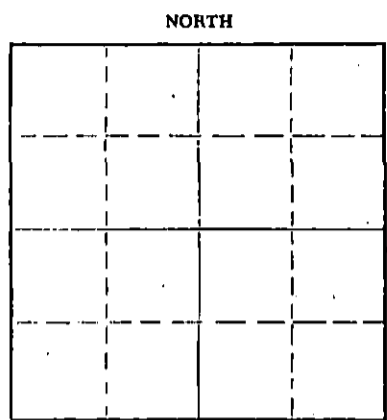

Locate well correctly on above
Section Plat

Kiowa County, Sec 31 Twp. 28S Rge. 19W (E) (W)
Location as "NE/CNW%SW%" or footage from lines 150' W of C NW SE
Lease Owner Raymond Oil Company, Inc.
Lease Name Cossell Well No. 1
Office Address Suite 800, 200 West Douglas, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-3 19 74
Application for plugging filed 12-3 19 74
Application for plugging approved 12-3 19 74
Plugging commenced 12-3 19 74
Plugging completed 12-3 19 74
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5140 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	473'	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 300', 35 sacks cement
Mud to 40', plug, 1/4 sack hulls, 10 sacks cement
2 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
DEC 9 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Don Gardner (employee of owner) or ~~(owner or operator)~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Suite 250, 200 West Douglas, Wichita, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 5th day of December, 19 74

My commission expires December 14, 1977

[Signature]
Notary Public.

DRILLERS LOG

#1 COSSELL
 150' W of C NW SE Section 31-28S-19W
 Kiowa County, Kansas

OPERATOR: Raymond Oil Company, Inc.
 Suite 800, 200 West Douglas
 Wichita, Kansas 67202

CONTRACTOR: Dunne-Gardner Petroleum, Inc.
 Suite 250, 200 West Douglas
 Wichita, Kansas 67202

COMMENCED: November 19, 1974

COMPLETED: December 3, 1974

CASING RECORD: 8-5/8" @ 473' w/375 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	315	Sand and shale
315	650	Shale
650	1130	Red Bed
1130	1157	Anhydrite
1157	2060	Shale
2060	2451	Shale and lime
2451	3035	Lime and shale
3035	4135	Shale and lime
4135	4298	Lime
4298	4380	Shale and lime
4380	5045	Lime
5045	5085	Lime and shale
5085	5140	Cherty lime
5140		Rotary total depth

RECEIVED
 STATE CORPORATION COMMISSION
 DEC 9 1974
 CONSERVATION DIVISION
 (Wichita, Kansas)


STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log, to the best of my knowledge and belief.


 Don Gardner

Subscribed and sworn to before me this 5th day of December, 1974.

My commission expires:
 December 14, 1977


 Notary Public