

Orig - State Corporation Commission
 Copy - Von Roe - 343 FPB, Bartlesville
 Copy - Oklahoma City
 Copy - File


15.159.00319.0001

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Rice County, Sec 23 Twp 20 Rge 6W (E) (W)

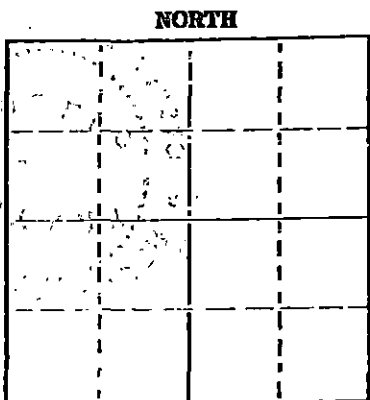

Locate well correctly on above Section Plat

Location as "NE/CNWESW" or footage from lines C NW SE NW
 Lease Owner Phillips Petroleum Company
 Lease Name *Welch Repressuring System Well No. W-13
 Office Address Box 287, Great Bend, Kansas 67530
 Character of Well (completed as Oil, Gas or Dry Hole) Water Input
 Date well completed June 3 19 57
 Application for plugging filed October 22 19 74
 Application for plugging approved 10-23-74 Renewed January 14 19 75
 Plugging commenced January 29 19 75
 Plugging completed February 6 19 75
 Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production Shut down water input
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
 Producing formation Mississippi Depth to top 3324 Bottom 3328 Total Depth of Well 3333
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Oil & water	3324'	3328'	8 5/8"	120'	0'
				4 1/2"	3333'	1860'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

On 1-29-75 Knight Csg Plrs MI to P&A SD WI well. Ran S.L., bridge @ 2510'. Ran bailer to 2625'. Ran S.L., bridge @ 2387'. Loaded hole & worked sand past bridge. Dmpd 4 sx cmt @ 2360' to 2350'. Pld 15" tens @ 14 pts. Shot @ 2226', 2140', 2044', 1949' & 1865'. Csg loose. Pld total of 60 jts (1860') 4 1/2" OD csg. Mudded hole to 40', rock bridge 40' to 30', 10 sx cmt 30' to cellar. Well P&A on 2-6-75.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling, Inc.
 Address Box 405, Chase, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
C. D. Dohrer (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. D. Dohrer Area Supt.
C. D. Dohrer
Box 287, Great Bend, Kansas 67530 (Address)

Subscribed and Sworn to before me this 3rd day of March, 19 75

December 9, 1978

Velma L. Zwenger Notary Public.



* Formerly the Fry "J" #1

RECEIVED
 STATE CORPORATION COMMISSION

MAR 11 1975

CONSERVATION DIVISION
 Wichita, Kansas

COPY

15.159.00319.0000

WELL LOG - FRY NO. 1

Ingling-Frazier et al, Lease Owner.

Section 23-20-6W

Donald T. Ingling, Contractor

Location: NW SE NW

Commenced: 5-21-57

County: Rice

Completed: 6-3-57

Production:

Total Depth: 3335' (rotary)

Elevation: 1593 DF

Casing: 8 5/8" 120' (55 sacks cement)
4 1/2" 3333' (65 sacks cement)

Figures below indicate bottom formation

30	surface rock	2015	shale
70	red rock	2145	shale and shells
120	shale and shells	2215	lime
320	shale, shells and red rock	2255	shale
775	shale and shells	2595	lime
830	sale and shale	2790	shale and sand
1045	lime	3136	lime
1165	lime - sandy	3281	lime and shale
1400	lime	3323	Conglomerate
1500	lime - sandy	3331	Weathered Mississippi
1610	lime	3335	Mississippi
1885	lime and shale	3335	Total Depth

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1974
CONSERVATION DIVISION
Wichita, Kansas

I certify this is a true and correct copy of the above mentioned well.

(signed)

D. T. INGLING

D. T. INGLING

STATE OF KANSAS)
) ss.
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, in said county and state.

(signed)

M. E. BLACK

M. E. Black, Notary Public

(SEAL)

My commission expires Feb. 27, 1960