

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.Give All Information Completely
Make Required Affidavit.
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

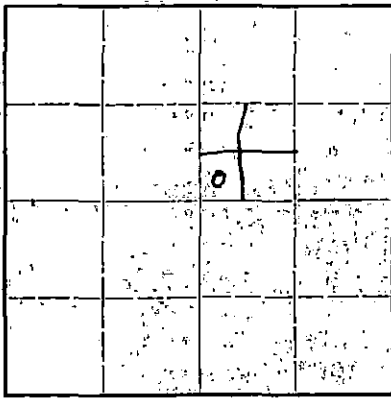Locate well correctly on above
Section Flat

Barton County. Sec. 8 Twp. 20SRge (E) 13 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW/4 SW/4 NE/4
Lease Owner. W.L. Hartman
Lease Name. Piller Well No. #1
Office Address. P.O. Box 54 Wichita 1, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed. _____ 19____
Application for plugging filed. _____ 19____
Application for plugging approved. _____ 19____
Plugging commenced June 29, 1945 19____
Plugging completed July 8, 1945 19____
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production. _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well. Mr. Herb. Kerr
Producing formation Arbuckle Depth to top. 3504 Bottom. 3542 Total Depth of Well. 3542 Feet
Show depth and thickness of all water, oil and gas formations:


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface	24# 8V	0	433	8/5/8	433	none
Oil String	14# 8 rnd	0	3 506	5 1/2	3506	1877.18

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3542 feet to 3512 feet for each plug set.

6 sacks cemented dumped at 3542' with approximate fill up of 30', mudded hole through 5" casing with heavy rotary mud from 3512' to 2700'. Shooting pipe thereafter to 1900', pipe loose for recovery, pulled 5" casing to 1600' and mudded hole through 5" casing to surface, then pulled 5" out of hole, then filled hole with heavy rotary mud to surface 250' cemented with 75 sacks cement, cement lowered in hole to 50' cemented with 15 sacks to base of cellar.

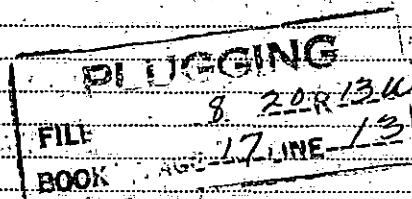

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Box 482, Great Bend, Kansas
Address. Standard Casing Pulling Co.

STATE OF Kansas COUNTY OF Barton SS. 7-25-1945
J. P. Phoebe (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

J. P. Phoebe
E. L. Woodward
Jul 25 1945
Conservation Division

SUBSCRIBED AND SWORN to before me this 16 day of JulyMy commission expires July 7 - 1948

Notary Public.


WELL LOG

W. L. Hartman, Owner - Pillor #1

SW SW NE Section 8, Township 20 S, Range 13 W,
Barton County, Kansas

Figures indicate bottom of formation

0	to	150	Sand and gravel
		185	Shale and shells
		280	Shale and sand
		315	Red sand
		342	Blue shale
		710	Red rock
Pipe:		735	Anhydrite
8 5/8" set at 424		1265	Shale and shells
5 1/2" set at 3506		1590	Salt, shale and shells
		1725	Shale and lime shells
		1810	Shells and shale
		1970	Shale, shells and lime
Top Lansing 3220		2060	Shale and shells
Top Conglomerate 3458		2070	Lime hard iron
Top Arbuckle 3504		2078	Shale and shells
		2177	Broken lime
		2277	Lime
		2386	Lime broken and shale
		2631	Shale
		2715	Lime shale
		2756	Shale
		3158	Lime
		3220	Lime
		3234	Broken lime and shale
		3390	Lime
		3429	Blue shale
		3458	Lime
		3504	Conglomerate
		3518	Arbuckle
		3518	Total Depth - Rotary
		3542	Total Depth - Standard Tools

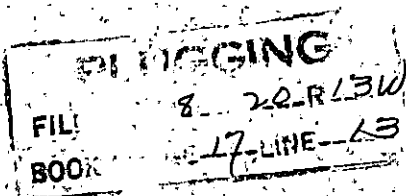


Started May 17, 1945
Completed rotary June 3, 1945

State of Kansas)
County of Barton) ss

I, G. W. Koyes, Drilling Contractor of the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well as filed and that the same are true and correct.

Subscribed and Sworn to before me this 14th day of June, 1945.

My commission expires July 7, 1948.

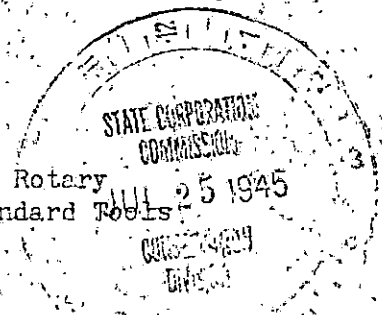

G. W. Koyes
J. L. Rader