


WELL PLUGGING RECORD

Give All Information Completely
Make Required Entry
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Barton County, Sec. 1 Twp. 20S Rge. 13 (E) W (W)

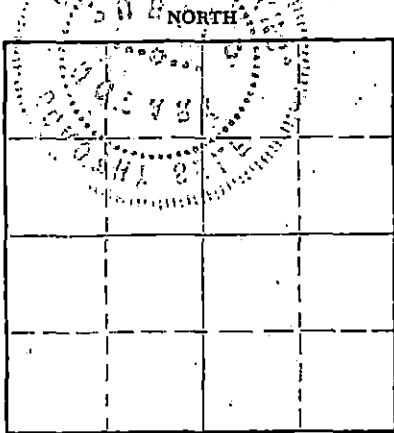

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines
Lease Owner Raymond Oil Co., Inc.
Lease Name Parrish Well No. 1
Office Address 410 Fourth National Bank Bldg., Wichita, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed July 29, 1965 19
Application for plugging filed February 8, 1967 19
Application for plugging approved February 9, 1967 19
Plugging commenced Feb. 14 19
Feb. 18 19 67
Plugging completed: 19 67
Reason for abandonment of well or producing formation No longer commercially productive.

If a producing well is abandoned, date of last production Unknown - Purchased for salvage 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FRDM	TD	SIZE	PUT IN	PULLED OUT
				8 5/8"	391'	
				5 1/2"	3451'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back in the 5 1/2" with gravel to 3440'. Dumped 5 sacks of cement.
Shot pipe off at 2797'. Pulled pipe and squeezed 20 sacks of Jet-Mud
and 90 sacks of cement with Halliburton.

2-27-67

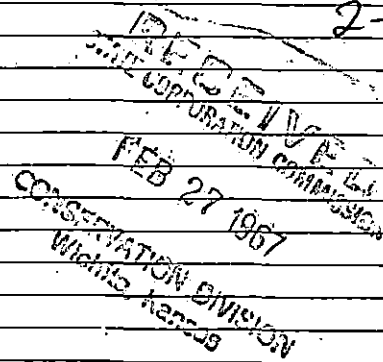

Name of Plugging Contractor Bert Self
Address Hutchinson, Kans.

STATE OF Kans, COUNTY OF Reno, ss. _____
(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans.
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of February, 1967

My commission expires October 18, 1969

Worley Self
Notary Public.

BR

15-009.30121.0000

Thoroughbred



drilling company • Tulsa

517 RITZ BUILDING TELEPHONE LU 2-1181

National Associated Petroleum Co. (operator)
Thoroughbred Drilling Co. (contractor)
C.C. Parrish # 1
Center of N/2 NW NW
1-20S-13W Barton Co., Kansas
388' 8-5/8" new 20#
set @ 391' w/250 cmt & 14 units QS

RECEIVED
STATE CORPORATION COMMISSION

FEB 9 1967

0'	-	160'	Sand
160'	-	280'	Shale
280'	-	320'	Shale & sand
320'	-	665'	Red bed & Gravel
665'	-	695'	Anhydrite
695'	-	1515'	Shale & Shells
1515'	-	2930'	Lime & Shale
2930'	-	3080'	Lime
3080'	-	3100'	Shale
3100'	-	3176'	Lime & Shale
3176'	-	3187'	Lansing Lime
3187'	-	3375'	K.C. Lime
3375'	-	3466 TD	Arbuckle Lime.

Daniel W. Brown

DANIEL W. BROWN
Owner
Thoroughbred Drilling Co.