


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

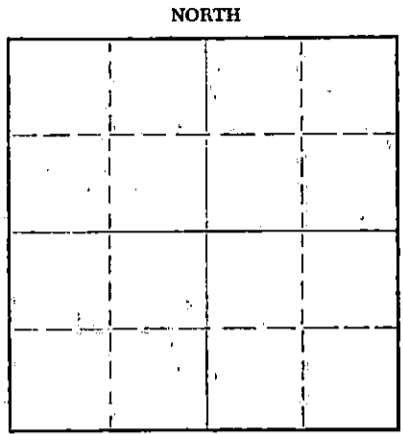

Locate well correctly on above
Section Plat

Rice County, Sec. 21 Twp. 20S Rge. 9W (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE SE
Lease Owner Duke Drilling Company
Lease Name Cross Well No. 1
Office Address Box 823 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed January 17, 1963 19
Application for plugging approved January 18, 1963 19
Plugging commenced January 17, 1963 19
Plugging completed January 25, 1963 19
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3285 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	161	none
				5 1/2	none	1819

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rigged up unit and jacks, cleaned out cellar, measured T.D. and sanded to 3220' and dumped 3 sx. cement.
Worked pipe and shot @ 2800'. Started to pull pipe and pipe broke into 3 pieces.
Working to screw pipe together.
Pulling pipe and steel nipple trying to screw pipe together. JAN 30 1963
Fished pipe and ran overshot. Pulled 18 jts. CONSERVATION DIV
Pulled rest of pipe. Wichita, Kansas
Plugged well @ 210', built 18' rock bridge and dumped 20 sx. cement. Mudded to 30' and built 18' rock bridge. Filled hole and rock bridge and capped well with 10 sx. cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of January, 1963

My commission expires July 23, 1966
Carolyn Herwin Notary Public

