


DISTRICT CONSERVATION AGENT'S REPORT

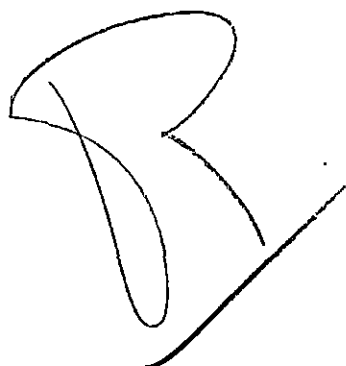

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 67-27

LOCATION SE 1/4 SW SW SE

SEC. 31 TWP. 10 RGE. 16-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 2 Lease Hoedyskell

Operator Phillips Petco Co. Address Box #779 S. Bond-Kans.

Field \_\_\_\_\_ County Barton

Total Depth 3848 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/8" - 1008 ft Circulated with cement  
5 1/2" casing set at 3834 ft - Cemented with 200 sacks cement.  
Plugged back to 3830 ft with shot - Dumped 5 sacks of  
cement at 3830 ft - Shot off & pulled the 5 1/2" casing - mud  
to 250 ft - Set back bridge & 15 sacks of cement at  
250 ft - mud to 30 ft - Plug & 10 sacks of cement  
at the surface -

West Supply Co. - Plugging Contractors

4-5-51

**RECEIVED**  
STATE CORPORATION COMMISSION  
APR - 5 1951  
**PLUGGING**  
FILE SEC 31 T 20 R 16 W  
BOOK PAGE 67 LINE 27  
WICHITA, KANSAS

C. H. Stough  
District Conservation Agent

Date 4-3-51