


DISTRICT CONSERVATION AGENT'S REPORT

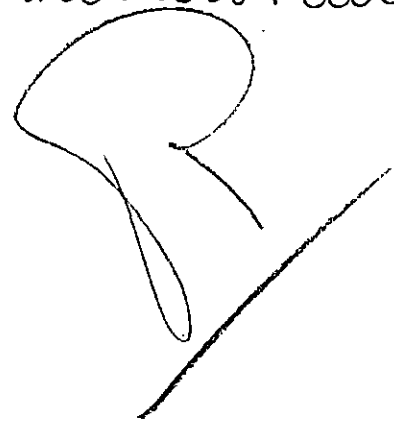

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 67-28

LOCATION SE 1/4 - CNE SE SE

SEC. 31 TWP. 20 RGE. 15-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 7 Lease Houdyshell

Operator Phillips Petro. Co Address Box # 779 - A. Bend - Kans.

Field \_\_\_\_\_ County Barton

Total Depth 3838 Feet.

(Describe briefly the manner in which the well was plugged)

Surf pipe 8 1/2" - 990 ft. Circulated with cement.  
5 1/2" casing set at 3838 ft. cemented with 100 sacks cement.  
Plugged back to 3800 ft. with cement & shot - Dumped  
5 sacks of cement at 3800 ft. Shot off & pulled the  
5 1/2" casing - mud to 250 ft. Set Rock. Bridge & 15 sacks  
of cement at 250 ft. mud to 30 ft. Plug &  
10 sacks of cement at the surface.  
West Supply Co. - Plugging Contractors

4-9-51

**PLUGGING**  
STATE CORPORATION COMMISSION  
FILE SEC 31 T 20 R 15W  
BOOK PAGE 67 LINE 28  
APR - 9 1951 Date 4-7-51  
DISTRICT CONSERVATION AGENT  
Wichita, Kansas

Co. W. Stough  
District Conservation Agent