

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rice County, Sec. 22 Twp. 20 Rge. 9 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE
Lease Owner Clinton Oil Company
Lease Name Birchenough Well No. 3
Office Address Wichita, Kansas

NORTH

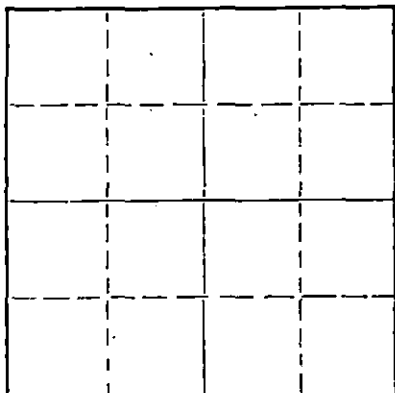

Locate well correctly on above
Section Plat

Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed September 1, 1962 19
Application for plugging filed November 8 19 66
Application for plugging approved November 14 19 66
Plugging commenced 11-17-66 19
Plugging completed 11-22-66 19
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production November 1 19 66
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3378 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	225'	None
				5-1/2"	3378'	2415'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3370', sanded hole to 3360' and dumped 5 sacks of cement @ 3360' with dump bailer. Pulled 5 1/2" casing, bridged hole @ 215' and dumped 20 sacks of cement. Mudded hole to 30' and ran 10 sacks of cement to capwell.

12-8-1966
RECEIVED
STATE CORPORATION COMMISSION

DEC 8 1966

CONSERVATION DIVISION
WICHITA, KANSAS

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or ~~former operator~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of November, 19 66

My commission expires May 20, 1968
Milton J. Volin Notary Public.

