


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Barton County, Sec. 9 Twp. 20 Rge. 12 (E) (W) X
SE/SW/SE

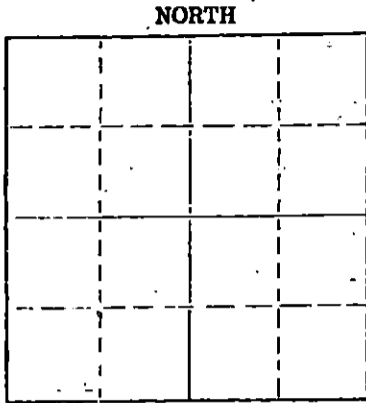

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Pauline Byars Oil Production
Lease Name HULME "C" Well No. 7
Office Address Box 836, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ April 23, 19 75
Plugging completed _____ April 25, 19 75
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3434 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	201	-0-
				4 1/2	3429	281.25

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Tried to measure in. Couldn't get below 280'. Pipe was parted. Pulled 9 joints of 4 1/2" casing. Plugged well with 3 sacks hulls, 25 sacks cement gel, 1 sack hulls, 25 sacks gel and 75 sacks 50/50 Pozmix with 4% added gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold (employee of owner) or (owner/owner's agent)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold James W. Rockhold
Box 698, Gt. Bend, Ks. 67530 (Address)

Subscribed and sworn to before me this 30 day of April, 19 75

My commission expires September 30, 1975

Cathy Miller Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

MAY 1 1975 5-1-75

CONSERVATION DIVISION
Wichita, Kansas

CHAS. HULME DRILLING CONTRACTOR
P. O. Box 836
Great Bend, Kansas

Hulme C # 7

SE SW SE 9 20 12

Barton County, Kansas

0	200	Sand	Elevation	1836' D.F.
200	643	Red Bed Shale		1839' R.B.
643	810	Anhydrite		
810	1350	Shale & Shells	Anhydrite	645'
1350	1540	Shale & Lime	Heebner	3027' - 1188'
1540	1930	Lime	Brown Lime	3137' - 1298'
1930	2753	Shale & Lime	Kansas City	3149' - 1310'
2753	3010	Lime		
3010	3205	Lime & Shale		
3205	3432	Lime		
3432		Rotary T.D.		

8 5/8" Casing set at 201', cemented with 200 sacks cement.

DST # 1

Packer set at 3150'. T.D. 3220'. Open 30 minutes. Very weak blow for 8 minutes. Recovered 10' rotary mud. BHP 44 lbs.

RECEIVED
STATE CORPORATION COMMISSION

DST # 2

Packer set at 3414'. T.D. 3432'. Open 45 minutes. Recovered 372' fluid, 160' clean oil, 212' muddy oil. BHP 668 lbs. in 20 minutes, still climbing.

CONSERVATION DIVISION
Wichita, Kansas

Drilling In

11-28-62 Swabbed hole down. Drilled 2 rubber plugs, float, 16' cement. Cleaned up. Drilled shoe. Cleaned up. Drilled 2' new hole.

11-29-62 Cleaned up off bottom with bailer. 200' fillup. Could not bail dry. Acidized with 1000 gallons. Swabbed hole down and tested with swab. Ran Bailer. Hole clean.

STATE OF KANSAS
COUNTY OF BARTON ss

Virgil E. Belford, Jr., employee of Chas. Hulme Drilling Contractor being first duly sworn on oath says: That I have knowledge of the facts, statement, and matters herein contained and the log of the above described well as filed and that the same are true and correct.

Virgil E. Belford, Jr.
Virgil E. Belford, Jr.

Subscribed and sworn before me this 31st day of December, 1962.

Jean Kimber
Notary Public Barton County

My Commission Expires: 12-3-63