

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. 20-26LOCATION NE-NE-SWSEC. 8 TWP. 20 RGE. 12W

Dry Hole Abandoned Oil Well Abandoned Gas Well


I have this date completed supervision of plugging of:

Well No. 1 Lease WeberOperator Hilton Drly Co. Address Box 108 Great Bend Kans.Field _____ County BartonTotal Depth 3497 Feet.Plugging Contractor Ace Pipe pulling Co.Plugging Contractor's License No. 2Address Great Bend Kans.

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 25 1954
 CONSERVATION DIVISION
 Wichita, Kansas

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 $\frac{1}{2}$ " @ 141' C.W.C. Oil string 5 $\frac{1}{2}$ "
 @ 3496 set w/ 100 sk cem. L.W.P. 3275 top by
 3252. Filled back with Chat to 3245' and
 dumped 5 sk cem with dump trailer. Shot off
 and pulled 5 $\frac{1}{2}$ " casing. Pumped in 15 sk of
 fresh fill mud, plug, and 75 sk of cem
 filling hole and surface from approx 225' to
 base of cellar with cem. Sun. Cem. Co.

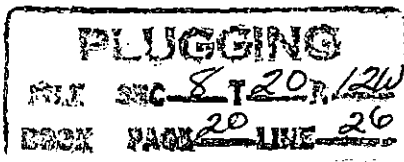

Warren H. Horner
 District Conservation Agent

Date Mar 23, 1954