

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-20538-00-00
Spot: SWNW Sec/Twnshp/Rge: 30-32S-9W
3300 feet from S Section Line, 4620 feet from E Section Line
Lease Name: MENG Well #: 1
County: HARPER Total Vertical Depth: 4357 feet

Operator License No.: 5039
Op Name: AGV CORP.
Address: 123 N MAIN PO BOX 377
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4340	1722	150 SX
SURF	8.625	328		200 SX

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 01/17/2018 12:00 AM
Plug Co. License No.: 35456 Plug Co. Name: 4G WELL SERVICE LLC
Proposal Rcvd. from: KENT ROBERTS Company: AGV CORP Phone: (316) 215-1683

Proposed AS PER KCC RULES & REGS
Plugging
Method:

Plugging Proposal Received By: DUANE KRUEGER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/19/2018 12:00 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 4290' & CAPPED WITH 2 SKS CEMENT. THE CASING WAS RECOVERED FROM 1726' & LAYED DOWN. 1-18-18 RAN TUBING TO 1400', SPOTTED 35 SX CEMENT. NO CEMENT AT 1400', SPOTTED ANOTHER 35 SX. NO CEMENT, TAG AT 1400'. SPOTTED 50 SX CEMENT SET OVER NIGHT. 1-19-18 TAGGED CEMENT TOP AT 1100'. RAN TUBING TO 900' SPOTTED 35 SX CEMENT. CIRCULATED CEMENT TO SURFACE FROM 380'-0' WITH 135 SX CEMENT.

Perfs:

Top	Bot	Thru	Comments
4340	4357		


Remarks: COPELAND CEMENT

Plugged through: TBG

INVOICED
MAR 01 2018

District: 02

Signed _____

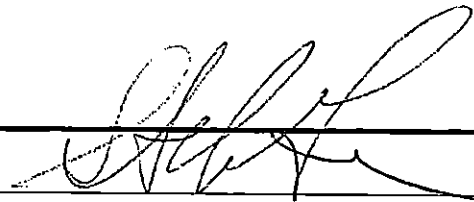

(TECHNICIAN)

1/2