


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barton
~~Stafford~~

County. Sec. 33 Twp. 20 Rge. (E) 13 (W)

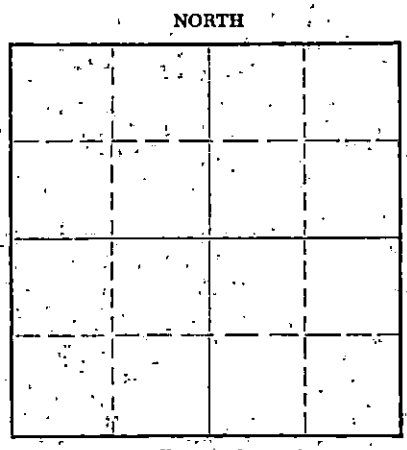

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Great Bend Pipe & Supply
Lease Name Hiss Well No. 1
Office Address Box 191 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 1-30 19 61
Plugging completed 2-6 19 61
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top: _____ Bottom _____ Total Depth of Well 3617 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	313	none
				5 1/2"	3608'	2675'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole to 3440'-dumped 5 sks cement.
pulled pipe-pumped in 20 sks mud and 80 sks
cement-let ~~xxx~~ cement set 48 hours-dumped
5 sks cement on top.

RECEIVED
STATE CORPORATION COMMISSION
MAR 16 1961
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor R & D Casing Pulling Co. License # 236
Address Box 572, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Nathan Meltzer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____
Box 191, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of March 19 61

My commission expires 3/30/61
Anne Meltzer Notary Public.

Formation Record

Lease **Hiss**Well No. **1**

FROM	TO	Formation	REMARKS
0	324	Shale, lime and sand.	
324	1055	Redbed and shale.	
1055	1585	Shale and shells.	
1585	1630	Fort Riley Lime.	
1630	2468	Lime and shale.	
2468	2690	Sandy shale and lime.	
2690	2913	Lime and shale.	
2913	3032	Lime.	
3032	3570	Lime and shale.	
3570	3589	Lime and chert.	
3589	3617	Lime.	

H I S S

NW/4 Sec 33-20S-13W
Barton County
Kans

Tops: Heebner 3150'. Toronto 3170'.
Brown Lime 3269'. LKC 3279'.
Base KC 3498'. Marmaton 3508'.
Pennsylvanian Detrital Zone 3525'.
Arbuckle 3587'. TD 3617'.
PBTB 3473'.

RECEIVED
STATE CORPORATION COMMISSION

JAN 31 1961

CONSERVATION DIVISION
Wichita, Kansas