

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County, Sec. 5 Twp. 30S Rge. 19 (E W) (W)

Location as "NE/CNW%SW%" or footage from lines NE SE

Lease Owner Anchor Drilling, Inc.

Lease Name Dunn Well No. 1

Office Address 415 Thompson Building, Tulsa, Oklahoma 74103

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed May 11, 19 72

Application for plugging filed May 11, 19 72

Application for plugging approved May 11, 19 72


Plugging commenced May 12, 19 72

Plugging completed May 12, 19 72

Reason for abandonment of well or producing formation No Productible Zone

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

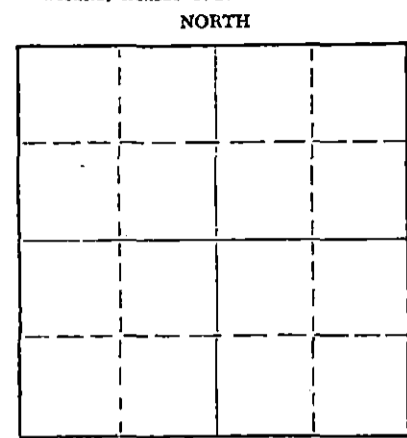

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5230 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	450	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Gunned up pits forming heavy mud. Filled hole with heavy mud. Pushed wooden plug to 400 feet, cemented with 35 sacks cement. Filled hole with heavy mud. Pushed plug to 40 feet, cemented with 15 sacks cement to base of well cellar. Rat hole and mouse hole with 2 sacks each. Job complete at 10:30 AM 5-12-72.

RECEIVED
STATE CORPORATION COMMISSION

MAY 18 1972

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company

Address Box 1164, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
Ben E. Unruh (employee of owner) ~~(owner or operator)~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ben E. Unruh

Box 1164, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of May, 19 72


My commission expires July 8, 1974

James C. [Signature]
Notary Public.

WELL LOG

COMPANY Anchor Drilling, Inc.
 FARM Dunn NO. 1
 TOTAL DEPTH 5230'
 COMM. 4-29-72 COMP. 5-12-72
 CONTRACTOR Garvey Drilling Company

SEC. 5 T. 30S R. 19W
 LOC. NE SE
 COUNTY Kiowa, Kansas



CASING
 8 5/8" @ 450' w/350sx

ELEVATION
 PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

- 460' Clay, Sand, & Red Bed
- 950' Sand & Shale
- 1231' Shale & Shells
- 2180' Shale & Lime
- 2467' Lime & Shale
- 4715' Lime
- 4900' Lime & Shale
- 4962' Lime
- 5050' Lime & Shale
- 5075' Lime
- 5098' Mississippian
- 5118' Cherty Lime
- 5182' Lime
- 5230' Lime & Chert
- 5230' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 18 1972
 CONSERVATION DIVISION
 Wichita, Kansas

State of Kansas }
 County of Barton } ss

I, Charlene Marker of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Dunn #1 well.

Subscribed and sworn to before me this 16th day of May, 1972
Charlene Marker

My Commission Expires: July 8, 1974

Yerme G. Novins
 NOTARY PUBLIC