


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

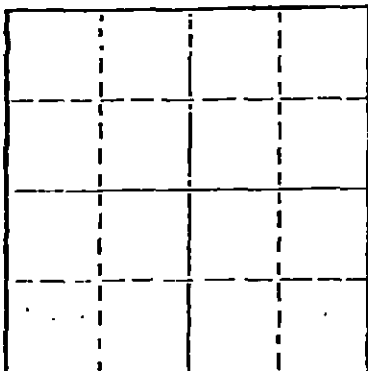

Locate well correctly on above
Section Plat

Kiowa County, Sec. 12 Twp. 30 Rge. 19 (E) (W)
C NW NW
Location as "NE/CNW/SW" or footage from lines
Lease Owner Maurice L. Brown Company
Lease Name Kane #2 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/21/76 19
Plugging completed 7/24/76 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation Depth to top Bottom Total Depth of Well 5154 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	409	none
				5 1/2"	5152	2367

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 5100' and set 5 sacks cement. Loaded casing with water, shot pipe at 3288', 2843', 2759', 2675', 2583', 2497', 2410', 2329', pulled 55 joints. Set rock bridge at 240' and ran 4 yards ready mix.

PLUGGING COMPLETE.

Name of Plugging Contractor VOTH CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
WALTER VOTH, ss.

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter Voth
CHASE, KANSAS (Address)

Subscribed and sworn to before me this 28th day of July 1976

My commission expires
NOTARY PUBLIC
MARGARET MELCHER
Rice County, Ks.
My Comm. Exp. Feb. 15, 1979

Margaret Melcher
Notary Public

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1976 7-30-76
CONSERVATION DIVISION
WICHITA, KANSAS

DRILLERS LOG

KANE NO. 2

CASING RECORD:	OPERATOR: Maurice L. Brown Co.	DESCRIPTION:
8-5/8" set @ 409' w/400 sax cement	CONTRACTOR: Sage Drilling Co.	C NW NW Sec. 12-30S-19W Kiowa Co., Kansas
TOTAL DEPTH:	COMMENCED: February 23, 1976	ELEVATION: 2240'KB
5154'	COMPLETED: March 11, 1976	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Sand	0	100	
Sand, Shale & Red-Bed	100	690	
Red Bed & Shale	690	1000	
Shale	1000	2150	
Lime & Shale	2150	4730	
Lime	4730	4756	
Lime & Shale	4756	4806	
Lime	4806	4892	
Lime & Shale	4892	4917	
Lime	4917	5013	
Lime & Shale	5013	5145	
Lime	5145	5154	5 1/2" set @ 5152' w/300 sax cement

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By *T. M. McCaul, Jr.*
T. M. McCaul, Jr.



Subscribed and sworn to before me this 22nd day of March, 1976.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires November 26, 1978.

RECEIVED
STATE OF KANSAS COMMISSION

MAR 01 1976

CONSERVATION DIVISION
Wichita, Kansas