


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
215 No. Broadway
Wichita, Kansas

15.009.05273.0000
WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Barton County, Sec. 25 Twp. 20S Rge. 13W (E) (W)

Location as "NE/CNWSW" or footage from lines C NE NW
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name G. V. Denbo Well No. 1
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed November 23, 1961 19
Application for plugging filed November 23, 1961 19
Application for plugging approved November 23, 1961 19
Plugging commenced November 23, 1961 19
Plugging completed November 23, 1961 19
Reason for abandonment of well or producing formation non-productive in commercial quantities
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3550 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	154'	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3550 to 150 feet.
Placed solid plug of hulls and Halliburton plug and
25 sacks cement through drill pipe - mud to 40 feet
another plug and 10 sacks of cement

RECEIVED
STATE CORPORATION COMMISSION
DEC 2 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Quaker Drilling Co., Inc. 12-4-61
Address 800 Bitting Building, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
Thomas M. McCaul (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thomas M. McCaul
800 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of November, 1961

My commission expires August 10, 1965
Virginia M. Mudd Notary Public.

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: November 15, 1961

Contractor: Quaker Drilling Co., Inc.

Completed: November 23, 1961

G. V. Denbo No. 1
C NE NW Sec. 25-20S-13W
Barton County, Kansas

Elevation: 1861 K.B.

Casing Record

Set 8 5/8 inch casing at 154 feet with 250 sacks cement

(Figures Indicate the Bottom of the Formations)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Surface Soil and Sand	97	Heebner	3097 -1236
Hard Sand	106	Brown Lime	3220 -1359
Shale	151	Lansing	3233 -1372
Pyrite and Sand	160	Base of Kansas City	3461 -1600
Shale	340	Conglomerate	3478 -1617
Sand Streaks	415	Arbuckle	3498 -1637
Red Bed	700	Rotary Total	
Anhydrite	715	Depth	3550 -1689
Shale	880		
Shale and Shells	1545		
Sandy Lime and Shale	1745		
Lime and Shale	2880		
Lime	3115		
Shale and Lime	3405		
Lime	3420		
Lime, chert and Shale	3498		
Dolomite	3550		


RECEIVED
STATE CORPORATION COMMISSION
DEC 4 1961
CONSERVATION DIVISION
Wichita, Kansas

We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the Center of the Northeast Quarter of the Northwest Quarter of Section 25, Township 20 South, Range 13 West, Barton County, Kansas.

QUAKER DRILLING CO., INC.

By: 

SUBSCRIBED AND SWORN to before me a Notary Public this 27th day of November, 1961.

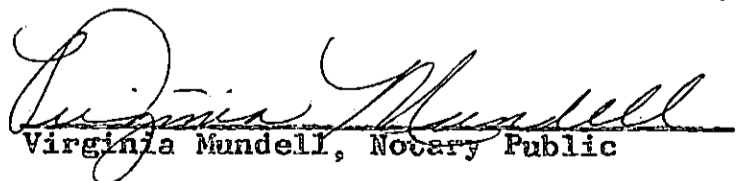
Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1965