

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-21071-00-00
Spot: SENWNWSW Sec/Twnshp/Rge: 34-18S-2E
2280 feet from S Section Line, 4843 feet from E Section Line
Lease Name: SCULLY A Well #: 3
County: MARION Total Vertical Depth: 2925 feet

Operator License No.: 5399
Op Name: TREK AEC, LLC
Address: 200 W DOUGLAS, SUITE 101
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2921		150 SX
SURF	8.625	208		150 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/09/2018 12:00 AM
Plug Co. License No.: 30280 Plug Co. Name: SUNFLOWER WELL SERVICE, INC.
Proposal Rcvd. from: TANNER NELSON Company: _____ Phone: (620) 755-2571

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: JERRY SPARLING Witness Type: PARTIAL
Date/Time Plugging Completed: 03/14/2018 1:00 PM KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF THE BOTTOM TO 2875'. TOPPED WITH 5 SX COMMON CEMENT WITH BAILER. PERF TECH PERFORATED AT 250'. RIG RAN TUBING TO 250'. PUMPED 65 SX 60/40 CEMENT WITH 4% GEL AND CIRCUALTED TO SURFACE. RAN 1" DOWN BACKSIDE AND PUMPED 20 SX TO SURFACE.

Perfs:

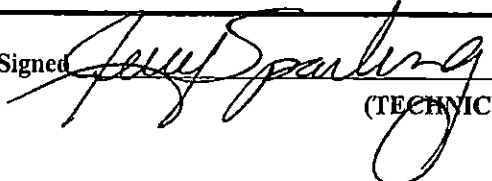
Top	Bot	Thru	Comments
2875	2920	CSG	

Remarks: OES TICKET #54858

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

INVOICED

APR 27 2018