

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-115-21095-00-00
Spot: SENENWSW Sec/Twnshp/Rge: 34-18S-2E
2262 feet from S Section Line, 4275 feet from E Section Line
Lease Name: SCULLY A Well #: 4
County: MARION Total Vertical Depth: 2927 feet

Operator License No.: 5399

Op Name: TREK AEC, LLC

Address: 200 W DOUGLAS, SUITE 101
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	2921		150 SX
SURF	8.625	210		150 SX

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 03/06/2018 12:00 AM

Plug Co. License No.: 30280

Plug Co. Name: SUNFLOWER WELL SERVICE, INC.

Proposal Rcvd. from: TANNER NELSON

Company:

Phone: (620) 755-2571

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: JERRY SPARLING

WitnessType: PARTIAL

Date/Time Plugging Completed: 03/14/2018 2:00 AM

KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF BOTTOM, RAN IN AND TAGGED WITH BAILER @ 2850'. CUT OFF WELLHEAD BACK SIDE CEMENTED TO SURFACE. BAILED DOWN TO 350'. SET PLUG AND RAN IN 330' OF 2 3/8" TUBING AND PUMPED 15 SX COMMON CEMENT TO SURFACE. 3/14/18 WELL CEMENT HAD FELL BACK, TOPPED OFF HOLE. QES RIGGED UP AND PUMPED 30 SX 60/40 CEMENT WITH 4% GEL. WELL TOPPED OFF AND STANDING FULL.

Perfs:

Top	Bot	Thru	Comments
2870	2920	CSG	

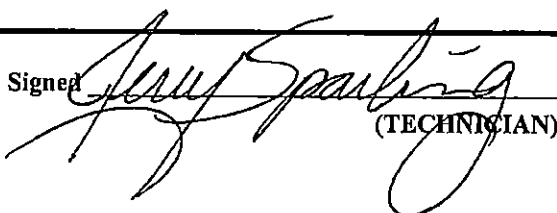
INVOICED
APR 27 2018

Remarks:

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

18