

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-113-21227-00-01
Spot: SWNESE Sec/Twnshp/Rge: 35-21S-3W
1650 feet from S Section Line, 990 feet from E Section Line
Lease Name: WILLARD STUCKY Well #: 1
County: MCPHERSON Total Vertical Depth: 3668 feet

Operator License No.: 31528
Op Name: MIKE KELSO OIL, INC.
Address: PO BOX 467
CHASE, KS 67524

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	7.875	3634		125 SX
SURF	8.625	256		175 SX
T1	5.5	3668		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/13/2018 11:30 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Revd. from: MIKE KELSO Company: MIKE KELSO OIL Phone: (620) 938-2943

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: JEFF KLOCK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/13/2018 11:30 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF BOTTOM, RAN IN AND TAGGED SAND @ 3470'. PERFORATED PRODUCTION CASING @ 310'. RAN IN 10 JOINTS 2 7/8" TUBING TO 315'. PUMPED 110 SX COMMON CEMENT 3% GEL AND 100 LBS COTTONSEED HULLS AND CIRCULATED TO SURFACE. PULLED TUBING AND TIED ON TO BACKSIDE AND PUMPED 20 SXS AND CIRCULATED TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3450	3525	CSG	

INVOICED

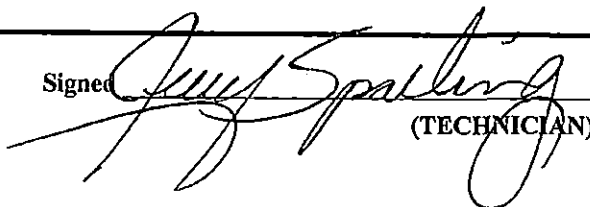
Remarks: COPELAND TICKET #45666 130 SX

APR 26 2018

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

JK