


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

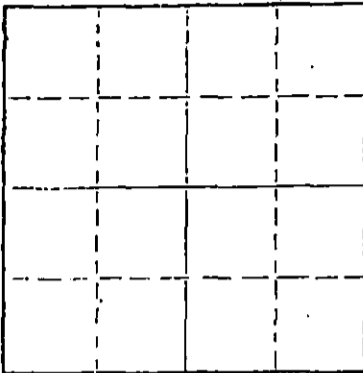

Locate well correctly on above
Section Plot

Barton County, Sec. 2 Twp. 20S Rge. 12W ~~12E~~ XWX
Location as "NE/CNW/SW" or footage from lines NW SE NE
Lease Owner Fell & Wolfe Oil Company
Lease Name DeWerff Well No. 6
Office Address P.O. Box 7447, Tulsa, Oklahoma 74105
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 27, 1976
Application for plugging filed Verbal Application 19 76
Application for plugging approved Verbal Approval 19 76
Plugging commenced May 27, 1976
Plugging completed May 27, 1976
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,354 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	204'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 3,354 feet (rotary total depth) to 500 feet. Set plug at 500 feet and cemented with 50 sxs cement.
Filled hole with heavy rotary mud from 500 feet to 200 feet. Set plug at 200 feet and cemented with 25 sxs cement.
Filled hole with heavy rotary mud from 200 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 10 sacks cement. Two sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cementing Co., Inc.
Address P.O. Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick
Dean Britting, Agent 58.

~~xxxxxx of owner) xxxxxx of operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd. day of June, 19 76
My commission expires June 30, 1978



Elsie Willison
Notary Public.

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS


COMPANY **Fell & Wolfe Oil Company**
FARM **DeWerff** NO. **6**

SEC. **2** T. **20S** R. **12W**
LOC. **NW SE NE**

TOTAL DEPTH **3,354'**
COMM. **May 19, 1976**
SHOT OR TREATED
CONTRACTOR **H-30, Inc.**
ISSUED **June 2, 1976**

COMP. **May 27, 1976**

COUNTY **Barton**
KANSAS



CASING
20 10
15 8-5/8" 204' cemented w/225 sxs cement ELEVATION **1,798' KB**
12 6
13 5

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand 130'
Pyrite 135'
Shale, Sand and Red Bed 1,460'
Lime and Shale 3,105'
Lime 3,354'
Rotary Total Depth 3,354'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

RECEIVED
STATE CORPORATION COMMISSION

JUN 03 1976

CONSERVATION DIVISION
Wichita, Kansas

State of Kansas }
County of Sedgwick }

Subscribed and Sworn to before me a Notary Public in and for said county and state this 2nd. day of June, 1976.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978

