


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

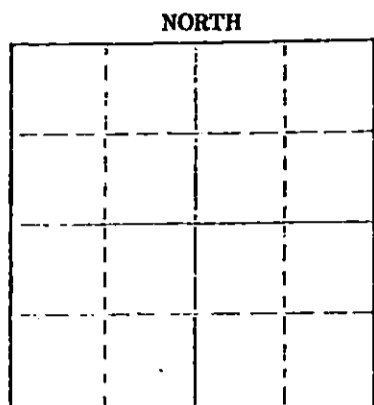

Locate well correctly on above Section Plat

Barton County. Sec. 2 Twp. 20S Rge. 12W (EX) (WX)
Location as "NE/CNW/SW" or footage from lines SE NW SE
Lease Owner Fell and Wolfe Oil Company
Lease Name Abigrim Well No. 1
Office Address P.O. Box 7447, Tulsa, Oklahoma 74105
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 6, 1974
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced September 6, 1974
Plugging completed September 6, 1974
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,375 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	TD	SIZE	PUT IN	PULLED OUT
			8-5/8"	250'	None
			9-13-74		

STATE RECEIVED
CORPORATION COMMISSION
SEP 13 1974
CONSERVATION DIVISION
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 3,375' (rotary total depth) to 420 feet. Set plug at 420 feet and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 420 feet to 240 feet. Set plug at 240 feet and cemented with 20 sacks cement. Filled hole with heavy rotary mud from 240 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 10 sacks cement, two sacks cement in rat hole.

Plugging operations accomplished utilizing Allied Oil Well Cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.
Address 200 North Main, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.
Dean Britting, Agent (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of September, 19 74

My commission expires 2-11-75 Ann Frail Notary Public.



15.009.20842.0000

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Fell and Wolfe Oil Company**

SEC. 2 T. 20S R. 12W
LOC. SE NW SE

FARM **Ahlgrim**

NO. 1

COUNTY **Barton**

TOTAL DEPTH **3,375'**


COMM. **August 29, 1974**

COMP. **September 6, 1974**

SHOT OR TREATED

CONTRACTOR **H-30, Inc.**

ISSUED



CASING

20	10		
15	8-5/8"	250' cemented w/225 sxs cement	ELEVATION 1,799' KB
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	250'
Red Bed	597'
Anhydrite	613'
Shale and Shells	1,587'
Lime and Shale	2,110'
Shale and Lime	2,893'
Lime and Shale	3,230'
Lime	3,375'
Rotary Total Depth	3,375'

RECEIVED
STATE CORPORATION COMMISSION
SEP 10 1974
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the above and foregoing
to be a true and correct log of the above
described well as shown by the drilling
reports.

H-30, INC.

Dean Britting

Dean Britting

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary
Public in and for said county and state
this 12th. day of September, 1974.

Ann Frailey

Notary Public

My Commission Expires:

2-11-75

