


15.009.00508.0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD



Locate well correctly on above Section Flat

Barton County, Sec 30 Twp 20 Rge 12 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Sitrin Petroleum Company
Lease Name Krone A#1 Well No.
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 8/11/70 19
Plugging completed 8/13/70 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation Depth to top Bottom Total Depth of Well 3520 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	248	none
				5 1/2"	3519	2802'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3590', ran sand to 3470' and dumped 5 sacks of cement. Loaded hole, shot pipe at 2886', 2790', worked pipe loose and pulled 97 joints. Had collar welded on 8-5/8 surface. Squeezed well with 3 sacks hulls, 20 sacks mud and 90 sacks of cement.

PLUGGING COMPLETE.


RECEIVED
STATE CORPORATION COMMISSION
SEP 22 1970
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn, doth, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas
(Address)

Subscribed and sworn to before me this 17th day of August, 1970

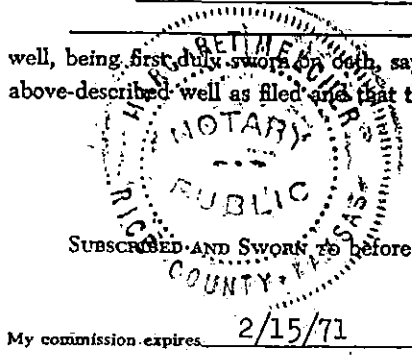

My commission expires 2/15/71
Margaret Melcher
Notary Public.

WELL # 1 - NE 1/4 Section 30-20-12 Barton County, Kansas
 Company - Virginia Drilling Co Inc.
 Contractor - same
 Commenced - December 16, 1954
 Completed rotary hole - December 31, 1954.
 Elevation - 1862 R B
 Total depth - 3519.

8 5/8" out at 243
 5" out at 3519

FORMATION ----- DEPTH -----

Top soil - sand	0 - 80
River rock - sand	80 - 120
shale-shells	120 - 385
Sandy shale - red bed	385 - 450
Red bed	450 - 684
Anhydrite	684 - 702
Shale-shells	702 - 1595
Line	1595 - 1725
Iron line	1725 - 1880
Line-chert	1880 - 1920
Line-shale	1920 - 2275
Shale-shells	2275 - 2610
Line-shale	2610 - 2860
Line	2860 - 2960
Line-shale	2960 - 3205
Line	3205 - 3476
Conglomerate	3476 - 3486
Arbuckle line	3486 - 3519 F.D.

FORES

- 3084 - Reddish shale
- 3209 - Iron line
- 3223 - Limestone
- 3463 - Conglomerate
- 3486 - Arbuckle

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 13 1970
 CONSERVATION DIVISION
 Wichita, Kansas

[Signature]
 B. A. Murphy

Subscribed and sworn to before me, a Notary Public, this
 15th day of February, 1955.

[Signature]
 Notary Public

My commission expires: Febr. 5, 1957.