


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Blitt Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Barton County. Sec. 21 Twp. 20 Rge. (E) 12 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C.E. line NE NE
Lease Owner Lario Oil & Gas Company
Lease Name Hulme Well No. I
Office Address Union National Bank Building, Wichita, Kansas.
Character of Well (Completed as Oil, Gas or Dry Hole) Dry
Date, well completed May 17 1938
Application for plugging filed May 17 1938
Application for plugging approved May 18 1938
Plugging Commenced May 18 1938
Plugging Completed May 18 1938
Reason for abandonment of well or producing formation
If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced?
Yes



Name of Conservation Agent who supervised plugging of this well Ed. Shell 5-28-38
Producing formation Depth to top Bottom Total Depth of Well 3468' 3" Feet.

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10"	286' 8"	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was filled with heavy mud to bottom of 10" surface pipe where 15 sacks of cement was dumped, filled to top with heavy mud where a cement cap of 10 sacks of cement was used.

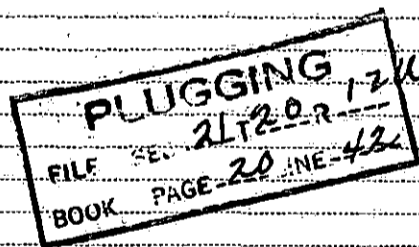

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to H. E. Miller,
Address Union National Bank Building,
Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Leo Ross (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo Ross

Wichita, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 26 day of May, 1938

My commission expires June 17, 1940

Margaret Brown
Notary Public.

Hulme No. 1

Total Depth 3468'
 Comm. 3-30-38
 Compl. 5-16-38

15.009.15564.0000

Contractor - Broadwater Drilling Company

Casing

10" 286'8"

Figures indicate bottom of formations.

Sand & shale	195	broken lime	2956	
lime	200	lime	2991	
shale & shells	274	broken lime	3024	
red rock & sand	398	shale & shells	3043	
red rock and shells	614	shale	3055	
lime	640	lime	3065	
shale & shells	768	lime	3065	
red rock & shells	868	shale & lime	3075	
shale & shells	1168	shale	3133	
sand & shale	1227	lime	3150	
sand & shale & shells	1405	Cored	3170-90	Recovered 19'6"
shale & limestone	1438	lime	3182	
lime	1448	show oil	3178-80	
shale	1463	shale blue	3183-8"	
lime	1541	lime	3187-4"	
lime	1599	Cored	3210-28	Recovered 12'3"
shale	1617	lime & small show oil	3212-8"	
lime	1641	lime & shale & shells	3215	
lime	1650	lime & shells		
lime	1675	lime & small show oil	3216 $\frac{1}{2}$	
shale & shells	1695	lime & shale & small show		
lime	1715	oil	3218 $\frac{1}{2}$	
shale & lime	1741	broken lime	3295	
broken lime	1775	broken lime & shale	3307	
shale	1790	broken lime & shale	3325	
broken lime	1832	lime	3341	
shale & shells	1898	lime	3347	
lime	1909	shale	3351	
shale	1945	lime	3380	
lime	1955	Cored	3380-89 $\frac{1}{2}$	
shale & lime	1968	lime & shale	3388	
lime & shale	1978	lime & shale	3393	
lime	1984	Cored	3393-3403 $\frac{1}{2}$	
broken lime	2072	shale	3398	
lime	2134	brown shale	3403	
shale	2178	shale	3412	
sand & lime	2192	chert & shale	3428	
shale & shells	2231	shale	3450	
lime	2240	shale, lime & chert	3468	
shale & shells	2332			
lime & shale	2395	Top Anhydrite	614 (S)	
red rock & shale	2404	Top Wellington	895 (S)	
shale	2443	Top Fort Riley	1690 (S)	
lime	2476	Top Kansas City	3155 (S)	
shale	2519	Top Arbuckle	3457 (S)	
lime	2570		13	
shale & lime	2592	Dry and abandoned.		
red rock & lime	2608			
lime & shale	2652			
shale	2688			
broken lime & shale	2705			
lime	2720			
shale	2758			
shale & shells	2780			
lime	2807			
shale	2815			
lime	2910			
lime & shale	2918			

PLUGGING
 FILE SEC 21 T 20 R 12 W
 PAGE 20 LINE 42

I, George D. Putnam, being first duly sworn on oath, state that I have knowledge of the facts and matter herein presented, and that the same are true and correct.

George D. Putnam

Subscribed and sworn before me this 16th day of May, 1938.

W. Eugene Brown
 Notary Public

My commission expires January 17, 1940