

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. 67-28

LOCATION SE-SE-21W

SEC. 30 TWP. 20 RGE. 11-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. B-1 Lease Sochen

Operator Mr. R. L. Williams Address Union Natl. Bank Bldg. Wichita-Kans.

Field _____ County Barton

Total Depth 3415' Feet.


(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4" - 250ft - Circulated with cement
5 1/2" casing set at 3414ft - Plugged back near bottom
to 3145ft with Lane Wells Plug - sand, chat & cement.
Mixed 5 sacks of cement at 3145ft - shot & pulled
4 1/2" casing - Filled with mud to 250ft - Set Rock Bridge
& 15 sacks of cement at 250ft - Mud to 20ft - Plug &
5 sack of cement at the surface

12/11/48

C. N. Stough
 District Conservation Agent

Date 11-29-48

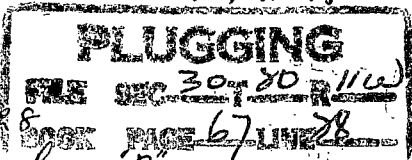

File # 67-28
 Well # 4-Sochen-B

I believe you will find that this
 Well # should be B-1 - C.C.S.