

RECEIVED STATE CORPORATION COMMISSION

JAN 17 1974

Form CP-4

CONSERVATION DIVISION

WELL PLUGGING RECORD Wichita, Kansas


STATE OF KANSAS STATE CORPORATION COMMISSION

Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission

P. O. Box 17027 Wichita, Kansas 67217 NORTH

Barton County, Sec. 28 Twp. 20S Rge. 11W (Ex (W)

Location as "NE/CNW&SW" or footage from lines NE/4 Lease Owner Mapco, Inc. Lease Name B. Hagen #1 Well No. 1 Office Address 1137 South Boulder Avenue, Tulsa, Oklahoma 74119 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Date well completed January 8, 1974 19 Application for plugging filed January 7, 1974 19 Application for plugging approved January 7, 1974 19 Plugging commenced 5:30 AM, January 8, 1974 19 Plugging completed 7:00 AM, January 8, 1974 19 Reason for abandonment of well or producing formation Dry Hole

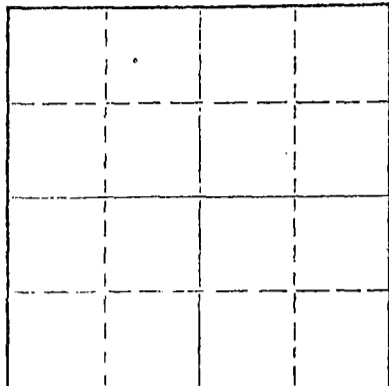

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation Depth to top Bottom Total Depth of Well 1595' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: 7", 219.29', None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud. 40 sacks cement at 400' through open end of drill pipe, Howco plug at 240' and 20 sacks cement. Bridge at 40', 10' sacks 50/50 Pozmix, 1% gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS, COUNTY OF RICE, ss. F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner, Secretary P. O. Box 129, Sterling, Kansas 67579 (Address)

SUBSCRIBED AND SWORN to before me this 10th day of January, 1974.

BERNARD LAUDERMILK - NOTARY PUBLIC My Commission Expires Jan. 22, 1974

Bernard Laudermilk, Notary Public.

STERLING DRILLING COMPANY  
P. O. Box 129  
Sterling, Kansas 67579

WELL LOG - - - - - B. HAGEN #1  
Located: NE/4, Section 28-20S-11W, Barton County, Kansas

OWNER: Mapco, Inc.  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: January 3, 1974  
COMPLETED: January 8, 1974

TOTAL DEPTH: 1595'

<u>LOG</u>	<u>CASING RECORD</u>
0 - 135 Sand and Gravel	Ran 8 joints 7" 24# used casing, 248.29' pipe set at 249.29' G.L.
135 - 1275 Shale	Cemented with 150 sacks 60/40 Pozmix with 3% cc. Plug down at 3:30 PM, 1-3-74.
1275 - 1381 Shale, Anhy. and Lime	
1381 - 1595 Lime and Shale	Plugged.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 17 1974  
CONSERVATION DIVISION  
Wichita, Kansas