


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barton County, Sec. 29 Twp. 20 Rge. 12W (E) (W)

Location as "NE/CNW%SW%" or footage from lines NW NE SW
Lease Owner E. K. Edmiston
Lease Name Simpson "A" Well No. 3
Office Address 501 First Nat'l Bk. Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-7-62 19
Application for plugging filed 12-7-62 19
Application for plugging approved 12-7-62 19
Plugging commenced 12-7-62 19
Plugging completed 12-8-62 19
Reason for abandonment of well or producing formation commercial quantities of oil not found
If a producing well is abandoned, date of last production _____ 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

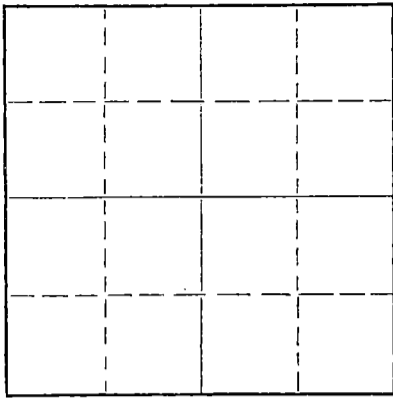

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3543 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	256	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 240'
1/2 sack hulls
8 5/8" rubber plug
25 sacks cement through drill pipe
Mud to 40'
1/2 sack hulls
8 5/8" rubber plug
10 sacks cement
2 sacks cement in rat hole

RECEIVED
STATE CORPORATION COM. 1962

12-19-62 DEC 19 1962

CONSERVATION DIVISION
WICHITA, KANSAS


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.
Address 501 First National Bank Bldg., Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss
E. K. Edmiston (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
501 First National Bank Bldg., Wichita 2
(Address) Kansas

SUBSCRIBED AND SWORN TO before me this 10th day of December, 19 62
My commission expires April 23, 1963
Juanita M. Green
Notary Public.



DRILLER'S LOG

COMPANY: E. K. EDMISTON
501 FIRST NATIONAL BANK BUILDING
WICHITA 2, KANSAS

ROTARY DRILLING COMMENCED: NOVEMBER 27, 1962

ROTARY DRILLING COMPLETED: DECEMBER 7, 1962

WELL NAME: SIMPSON "A" #3
NW NE SW SEC. 29-20S-12W
BARTON COUNTY, KANSAS

CONTRACTOR: E. K. EDMISTON DRILLING CO., INC.
501 FIRST NATIONAL BANK BUILDING
WICHITA 2, KANSAS

CASING RECORD: 8 5/8" @ 256' w/ 250 sacks

LOG

0 - 94	Sand and Shale
94 - 220	Sand and Shale
220 - 255	Shale
255 - 580	Red Bed, Shale and Shells
580 - 659	Shale
659 - 674	Anhydrite
674 - 1230	Shale and Shells
1230 - 1425	Shale and Shells
1425 - 1586	Shale and Lime
1586 - 2040	Lime
2040 - 2195	Lime and Shale
2195 - 2660	Shale and Lime
2660 - 2805	Lime and Shale
2805 - 2955	Lime
2955 - 3059	Lime
3059 - 3188	Shale and Lime
3188 - 3375	Lime
3375 - 3500	Lime
3500 - 3520	Lime and Chert
3520 - 3543	Lime
3543	<u>Rotary Total Depth - D & A</u>

RECEIVED
STATE CORPORATION COMMISSION

DEC 19 1962

CONSERVATION DIVISION
WICHITA, Kansas

The undersigned, E. K. Edmiston, President of the E. K. Edmiston Drilling Company, Inc., hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.


E. K. Edmiston Drilling Co., Inc.

By 
E. K. Edmiston, PresidentSTATE OF KANSAS)
)
COUNTY OF SEDGWICK)

ss:

BE IT REMEMBERED that, on this 10th day of December, 1962, before me, the undersigned, a Notary Public duly commissioned in and for the State and County aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument as President and in behalf of the E. K. Edmiston Drilling Company, Inc. and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.

My Commission Expires:
April 23, 1963
Juanita M. Green, Notary Public