


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pawnee County. Sec. 15 Twp. 20S Rge. 16W KW  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines \_\_\_\_\_  
C- SW NW NE  
Lease Owner Rupe Oil Company, Inc.  
Lease Name Hanson Well No. 2  
Office Address P.O. Box 2273-434 Ohio, Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole) 67201  
Dry Hole  
Date Well completed August 11, 1978  
Application for plugging filed Verbal Application 19\_\_\_\_  
Application for plugging approved Verbal Approval 19\_\_\_\_  
Plugging commenced August 11, 1978  
Plugging completed August 11, 1978  
Reason for abandonment of well or producing formation \_\_\_\_\_

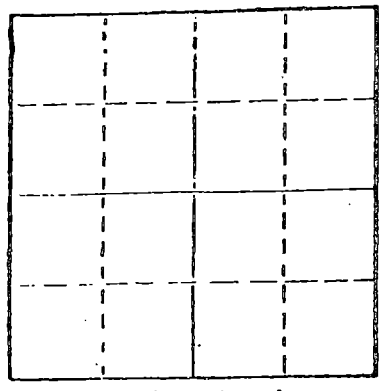

Locate well correctly on above  
Section Plot

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,811  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	289'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 3,811 ft. (rotary total depth) to 650 ft. Set plug at 650 ft. and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 650 ft. to 240 ft. Set plug at 240 ft. and cemented with 20 sacks cement. Filled hole with heavy rotary mud from 240 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4 1/2 inch drill pipe.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services  
410 Union Center Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Merle Britting, Agent ~~XXXXXXXXXX~~ of owner ~~XXXXXXXXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Merle Britting  
200 N. Main, Wichita, Kansas 67202  
(Address)



SUBSCRIBED AND SWORN TO before me this 17th day of August, 1978

My commission expires July 25, 1982

Elsie Willison  
Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 18 1978 8-18-78

KANSAS DRILLERS LOG

COMPANY Rupe Oil Company, Inc.

SEC. 15 T. 20S R. 16W

FARM Hanson

NO. 2

LOC. C- SW NW NE

COUNTY Pawnee

ROTARY TOTAL DEPTH 3,811'

COMM. August 3, 1978

COMP. August 11, 1978

CONTRACTOR H-30, Inc.

ISSUED August 17, 1978

CASING

10 3/4"

8 5/8" Set at 289' cemented w/200 sxs cement

ELEVATION 2,057 K.B.

5 1/2"

4 1/2"

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale, Sand and Red Bed	1,074'
Anhydrite	1,108'
Shale, Shells and Chert	1,675'
Shale and Lime	2,442'
Lime and Shale	3,811'
Rotary Total Depth	3,811'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, Inc.

Merle Britting  
Merle Britting

State of Kansas }  
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 17th day of August, 1978.



Elsie Willison  
Elsie Willison - Notary Public

My Commission Expires:

July 25, 1982

RECEIVED  
STATE CORPORATION COMMISSION

AUG 18 1978

CONSERVATION DIVISION  
Wichita, Kansas