

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
 Conservation Division
 800 Bitting Building
 Wichita, Kansas

FILE NO. _____

LOCATION ~~SE 1/4~~ SW SE NE

SEC. 13 TWP. 20 RGE. 11-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

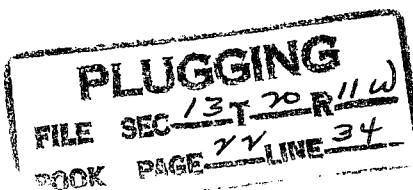
I have today completed supervision of plugging of:

Well No. 2 Lease PetersOperator Mouser Drilling Co. Address Union Natl. Bank Bldg. - WichitaField _____ County BartonTotal Depth 3319 Feet.

(Describe briefly the manner in which the well was plugged)

Super Pipe 8 1/2" - 176 ft. Circulated with Cement.
5 1/2" cas - g set at 3290 ft. Filled back down bottom to
2975 ft with rock - 5 sacks cement dumped at 2975 ft
Shot & recovered at 5 1/2" cas - g - Filled with
mud to 175 ft. Bridge & 15 sacks of Cement. Mud to
20 ft. Bridge & 10 sacks of Cement

C. M. Stough -
 District Conservation Agent

Date 4-12-48

APR 15 1948

4-15-48