

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

McPherson

#####

County, Sec. 12 Twp. 19 Rge. 2 W (E) (W)

Location as "NE/CNWKSWK" or footage from lines C SI SE NW

Lease Owner Alfred Koehn

Lease Name Ostlind Well No. I

Office Address Galva, Kansas 67443

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 7-27 19 75

Application for plugging filed 7-12 19 76

Application for plugging approved 7-13 19 76


Plugging commenced 7-16 19 76

Plugging completed 7-20 19 76

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

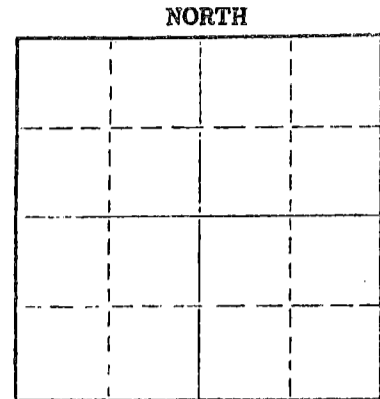

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2990'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,135'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

RECEIVED
STATE
JUL 25 1976
CONSERVATION DIVISION
WICHITA, KANSAS
4/23/76

Plugged off bottom of hole with sand. Sand from 2990' to 2950'. Dumped 5 sx of cement. Mudded hole to 170'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

Name of Plugging Contractor Art Lamb Casing Pulling Inc
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Art Lamb

2809 King St. Hutchinson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of July, 19 76

My commission expires December 31, 1977

Judy Lamb
Notary Public.



Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone (316) 241-1250

McPHERSON, KANSAS 67460

July 28, 1975

COMPANY: ALFRED KOEHN
 CONTRACTOR: BLACKSTONE DRILLING, INC.
 FARM: OSTLIND #1
 LOCATION: C SL SE NW, Section 12-19-2W,
 McPherson County, Kansas
 COMMENCED: July 22, 1975
 COMPLETED: July 27, 1975
 ELEVATION: 1567 K. B.

0	to	50	Shale
50	to	90	Sand
90	to	140	Shale
140	to	530	Lime & Shale
530	to	1075	Lime & Shale
1075	to	1445	Shale
1445	to	1860	Shale & Lime
1860	to	2160	Lime
2160	to	2370	Lime & Shale
2370	to	2770	Lime
2770	to	2905	Lime & Shale
2905	to	2927	Shale
2927	to	2990	Mississippi
		2990	T. D.

RECEIVED
STATE GEOLOGICAL COMMISSION

JUL 28 1975

STATE GEOLOGICAL COMMISSION
Wichita, Kansas

Cut 12 1/2" hole to 140' and run 142' of 8 5/8" surface pipe, cemented with 110 sacks of cement at 140'. Plug down at 2:00 P. M., July 17, 1975. Cut 7 7/8" hole to 2990'. Run 3010' of 5 1/2" pipe, cemented with 40 sacks at 2989', 1 foot off bottom. Plug down at 3:00 A. M., July 27, 1975.

TOPS: MISSISSIPPI - 2927'

Measurements taken from K. B.

CERTIFICATE

I, P. E. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Ostlind #1, located on the C SL SE NW, Section 12-19-2W, McPherson County, Kansas as reflected by the files of Blackstone Drilling, Inc.

P. E. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 28th day of July, 1975.

Johnnie L. Schmidt - Notary Public

