

STATE OF KANSAS
STATE CORPORATION COMMISSION

**Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas**

NORTH

**Locate well correctly on above
Section Plat**

Name of Conservation Agent who supervised plugging of this well..... C. D. Stough - State plugger.....

Producing formation..... Depth to top..... Bottom..... Total Depth of Well..... Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, fromfeet tofeet for each plug set.

Filled hole w/ crushed rock 3250' to 2970'
dumped 5 sax cement
Mudding hole - plug set at 175'
cemented w/ 15 sax- mudded hole to top
capped with 10 sax cement

4-22-48

APR 22 1948

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... Mouser Drilling Company
Address..... 405 Union Nat'l Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
B. L. Mouser (employee of owner) or (owner or owner's agent)

_____ B. L. Mouser _____ (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

THE MOUSER DRILLING COMPANY
(Signature) By: *R. H. Mouser*
405 Union National Bank Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of April, 19 48

My commission expires.

PLUGGING
FILE SEC 13 T 70 R 110
BOOK PAGE 22 LINE 34

21-543-s

8-45—6M



Notary Public.

Peters No. 2 Well

Sec. 13-20-11W - Barton, County, Kansas

Drilled for: Western Petroleum Exp Co
&
Mouser Drilling Company

Drilled by: Mouser Drilling Company

Drilling Commenced: January 22, 1947
Drilling Completed: February 3, 1947Casing Record:8 5/8" 105'
5 1/2" 3291' 11# 8 rd thd Casing


<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION</u>	<u>DEPTH</u>
Cellar	5		
Sand	40		
Blue shale	105		
Shale	170		
Red bed	460		
Anhydrite	475		
Shale and shells	925		
Salt	1210		
Shale and shells	1340		
Lime and shale	1630		
Flint	1655		
Lime and shale	1800		
Lime	1840		
Lime and shale	2350		
Lime	2410		
Lime and shale	2605		
Lime	2930		
Shale and shells	2992		
Lime	3005		
Lime and shale	3010		
Lime	3291	Top of K.C.	3027'
		Top Cong.	3282'
		Top Arb.	3290'
Total Depth	3291'		

STATE OF KANSAS

SS:


COUNTY OF SEDGWICK

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the above location described to the best of my knowledge and belief.

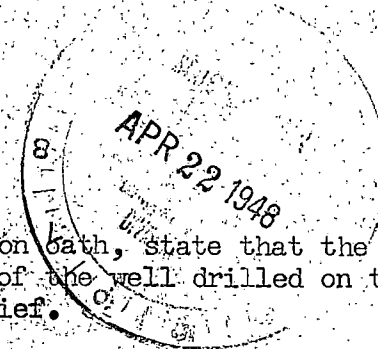

R. H. Mouser
Subscribed and sworn to before me this 3rd day of February 1947.

My Commission Expires:

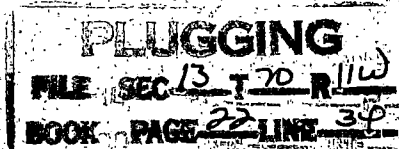March 18 1950Frances L. Webber