


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

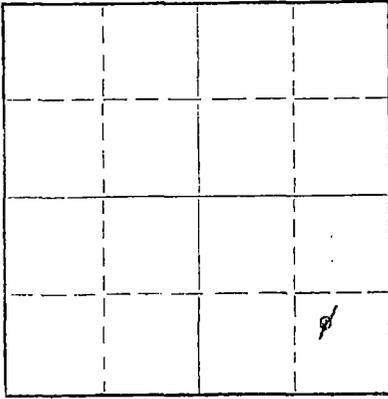

Locate well correctly on above
Section Plat

Barton County. Sec. 13 Twp. 20S Rge. (E) 11 (W)
Location as "NE/CNW/SW" or footage from lines NW SW SW
Lease Owner Lario Oil & Gas Company
Lease Name Meyer "A" Well No. 5
Office Address 301 S. Market, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed April 13 19 49
Application for plugging filed November 18 19 63
Application for plugging approved November 19 19 63
Plugging commenced November 21 19 63
Plugging completed November 25 19 63
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production August 24 19 63
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Arbuckle Depth to top 3265 Bottom _____ Total Depth of Well 3302 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	222	None
				5 1/2"	3266	2645'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug at 3250' and run 5 sacks of cement from 3250 to 3225'.
Mudded 3225' to 220'. Rock bridge 220' to 210'. Run 5 sacks cement
210' to 195'. Run 20 sacks cement 195' to 135'. Mud 135' to 35'.
Rock bridge and 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

DEC 5 1963

CONSERVATION DIVISION
Wichita, Kansas

12-5-63

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Co.
Address Box 156, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Leo Ross (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
301 S. Market, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of December, 19 63

My commission expires July 21, 1966

[Signature]
Notary Public.



15.009.07231.0000

Lario Oil & Gas Company
Meyer "A" No. 5
NW/4 SW/4 SW/4
Sec. 13-20S-11W
Barton County, Kansas

Contractor: Prime Drilling Co.
Date Spudded: 3/31/49
Date Completed: 4/13/49
Elevation: 1754'

0- 75	Sand
75- 222	Shale and Red Bed
222- 460	Red Bed - shale
460- 935	Shale-shells
935-1065	Salt and shale
1065-1570	Shale and shells
1570-1785	Shale-lime
1785-1940	Lime
1940-1960	Lime-shale
1960-2365	Shale-lime
2365-2675	Lime-shale
2675-2860	Lime
2860-2900	Lime-shale
2900-3015	Shale
3015-3311	Lime

ACID:
500 Gal.
1000 Gal.
2000 Gal.

CASING:
8 5/8" - 222'
5 1/2" - 3266'

TOPS: Measurements Rotary Derrick Floor

Heebner	2861
Brown Lime	2992
Kansas City	3011
Base Kansas City	3229
Arbuckle	3265
Total Depth	3311

RECEIVED
STATE CORPORATION COMMISSION

NOV 19 1963

CONSERVATION DIVISION
Wichita, Kansas