

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittie  
Wichita, Kansas

Barton County, Sec. 13 Twp. 20 Rge. 11 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SE NE

Lease Owner National Cooperative Refinery Association

Lease Name Peters Well No. 14

Office Address 305 Rule Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed February 24, 19 52

Application for plugging filed January 31, 19 55

Application for plugging approved February 2, 19 55


Plugging commenced February 14, 19 55

Plugging completed February 16, 19 55

Reason for abandonment of well or producing formation Depletion of producing formation.

If a producing well is abandoned, date of last production May, 19 53

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

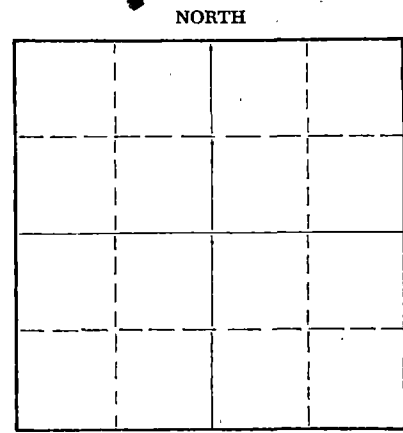

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Warren Horner

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3295 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	162'	None
				5 1/2"	3291'	2942'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled the hole with sand from 3295' to 3280' and ran 5 sacks of cement. Pumped in 10 sacks of jell mud and 80 sacks of cement to fill to base of cellar.

Name of Plugging Contractor West Supply Company  
Address Chase, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
C. R. Sears (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. R. Sears  
305 Rule Building, Wichita, Kansas

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1955

My commission expires June 30, 1958.

C. Orville May  
Notary Public.



2-24-55

National Cooperative Refinery Assn.  
Peters #14

SEC. 13 T. 20S R. 11W  
NW SE NE

County Barton

Total Depth 3293'  
Comm. 2-14-1952 Comp. 2-24-1952  
Contractor Braden Drilling Co.

Elevation 1753

Casing Record:

8-5/8" set at 160 ft Cemented with 165 sacks  
5-1/2" set at 3287 ft Cemented with 75 sacks

Clay & Sand	50
Shale & Shells	152
Shale & Red Bed	320
Red Rock, Shale & Shells	765
Shale & Shells	1300
Shale & Lime	1570
Lime & Shale	1730
Lime & Shale Breaks	1925
Shale & Shells	2340
Shale & Lime	2410
Lime & Shale	2535
Shale & Shells	2625
Lime & Shale Breaks	2730
Lime	2950
Lime & Shale	3040
Lime	3293 T. D. Rotary

STATE OF KANSAS, )  
( SS:-  
SEDGWICK COUNTY, )

I hereby certify that the above information is true and correct to the best of my knowledge and belief.

Jane B. Heasler

Subscribed and sworn to before me this 29th day of February, 1952.

Levin E. Patrick  
Notary Public.

My commission expires: Feb. 13, 1954

**PLUGGING**  
WELL SEC 13 T 20 R 11W  
BOOK PAGE 94 LINE 24

REC  
STATE COM  
CONSENT  
Division  
Marta, R. Mack