


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kiowa County, Sec. 21 Twp. 30S Rge. 18W E/W
Location as "NE/CNE, SW, or footage from lines
C NE SW

Lease Owner Maurice L. Brown
Lease Name R. Smith No.1 Well No.
Office Address 1500 Vickers KSB&T Building, Wichita 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

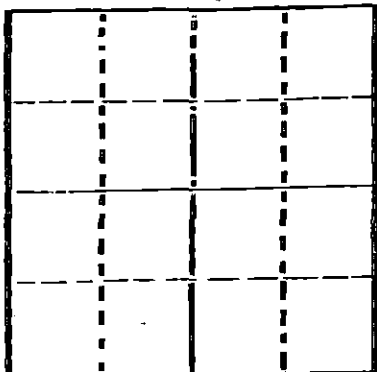

Locate well correctly on above
Section Plot

Date Well completed June 26 19 76
Application for plugging filed June 26, 19 76
Application for plugging approved June 26 19 76
Plugging commenced June 26 19 76
Plugging completed June 26 19 76
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 5250'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	THICK	IN	SIZE	FEET IN	GRADED BEST
Surface	8-5/8"	0	502	8-5/8	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug @ 300' with 35 sacks
Bridge @ 40' with 15 sacks cement
5 sacks in rathole
Job complete at 12 noon 6/26/76

RECEIVED
STATE CORPORATION COMMISSION

JUN 26 1976 7-6-76

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company

STATE OF Kansas COUNTY OF Sedgwick

James C. Remsberg (employee of owner) or (owner or operator) of the above described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.


(Signature)

Rena Stucky, Engr. Ass't.
408 One Twenty Building, Wichita 67202

Subscribed and sworn to before me this 3 day of July 19 76

My commission expires January 17, 1977

Mary Lou Taylor
Notary Public



DRILLERS LOG

COMPANY: Maurice L. Brown Company
 1500 Vickers KSB&T Building
 Wichita, Kansas 67202

LEASE NAME: R. Smith No.1
 C NE SW
 Sec.21-30S-18W
 Kiowa County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
 408 One Twenty Building
 Wichita, Kansas 67202

TOTAL DEPTH: 5250'

COMMENCED: 6/11/76

COMPLETED: 6/26/76

CASING: 496.79' 8-5/8" new Surface, with 400 sx cement

0 to 480' Surface Hole
 480' to 885' Red bed & sand
 885' to 1100' Shale & Shells
 1100' to 2182' Shale & shells
 2182' to 2340' Shale
 2340' to 2575' Shale & Lime
 2575' to 3216' Lime & Shale
 3216' to 3485' Shale & Lime
 3485' to 4933' Lime & Shale
 4933' to 4945' Marmaton Lime
 4945' to 5057' Lime
 5057' to 5155' Lime & Shale
 5155' to 5250' Miss. Lime
 5250' RTD

RECEIVED
 STATE CONSERVATION COMMISSION
 JUL 06 1976
 CONSERVATION DIVISION
 WICHITA, KANSAS

STATE OF KANSAS
 COUNTY OF SEDGWICK

I, Rene Stucky, of the SLAWSON DRILLING COMPANY, INC. upon oath state that the above and foregoing is a true and correct copy of the log of the R. Smith No.1 well.

Rene Stucky
 Rene Stucky, Engr. Ass't.

Subscribed and sworn to me on July 3, 1976

Mary Lou Taylor
 Mary Lou Taylor, Notary

My commission expires January 17, 1977

