

STATE OF KANSAS


Form CP-4

STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

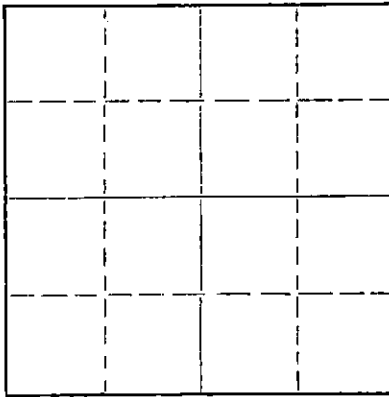

Locate well correctly on above
Section Plat

Rice County, Sec. 22 Twp. 20 Rge. (E) 10 (W)
Location as "NE/CNW/SW" or footage from lines NW NE NE
Lease Owner Specter Pipe & Supply, Inc.
Lease Name Gill Well No. 2
Office Address Box 169, Russell, Kas.
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 2-4-62 19
Application for plugging filed 8-7-68 19
Application for plugging approved 8-8-68 19
Plugging commenced 8/17 1968
Plugging completed 8/21 1968
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation arbuckle Depth to top 3398' Bottom 3399' Total Depth of Well 3401 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	177'	none
				5 1/2"	3399'	2618.28'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with sand to 3000', 5 sacks cement.
Mud to 500', 25 sacks cement.
Mud to 200', 25 sacks cement.
Mud to 50', set rock bridge (10')
10 sacks cement to top.

RECEIVED
STATE CORPORATION COMMISSION
AUG 28 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing Pulling Co
Address rt 4, Great Bend, Kan

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

[Signature]
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 19 68

My commission expires December 1, 1968

[Signature]
Elsie Coady
Notary Public.




WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- MUIR-THOMPSON, INC.
Farm- Gill No. 2

SEC. 22 T. 20 R. 10W
NW NE NE

Total Depth. 3401'
Comm. 1-23-62 Comp. 2-4-62
Shot or Treated.
Contractor. Tomlinson-Kathol, Inc.
Issued. 6-2-62

County Rice, KANSAS



CASING:
8 5/8" 177' cem w/110 sx.
5" 3399'

Elevation. 1843' RB

Production. 80 BOPD & NW

Figures Indicate Bottom of Formations.

sand & shale	90
shale & shells	177
shale	1455
shale & lime	2115
lime	2332
shale	2535
shale & lime	2678
lime	2929
lime, shale	3163
lime	3401 RTD
Total Depth	

TOPS: SCOUT	
Heebner	2916
Arbuckle	3398

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 1968
CONSERVATION DIVISION
Wichita, Kansas