

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission,  
800 Blitting Building,  
Wichita, Kansas

Barton County, Sec. 1 Twp. 20 Rge. (E) 11 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE 1/4 NW 1/4 SE 1/4

Lease Owner Courtney B. Davis

Lease Name E. Steckel Well No. 2

Office Address 502 Fourth Natl. Bank Bldg., Wichita, Kansas.

Character of Well (Completed as Oil, Gas or Dry Hole)

Date, well completed December 21 1935

Application for plugging filed January 6, 1936

Application for plugging approved January 6, 1936


Plugging Commenced January 8, 1936

Plugging Completed January 11, 1936

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 193

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

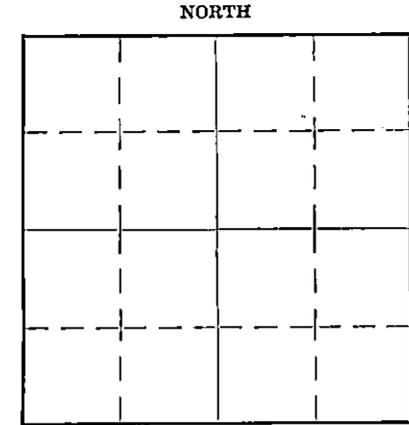

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well Raymond Gear, Sterling, Kansas.

Producing formation Depth to top Bottom Total Depth of Well 3320 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				12 1/2	135'	None
				7.0D	3278'	2100'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Cemented from 3320 to 2950  
Plug set in bottom of 12 1/2" casing at 135'  
Cemented with 15 sacks cement  
Filled with mud to cellar  
Cellar filled after rig was removed.

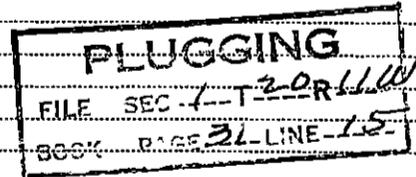

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to Courtney B. Davis, Inc.  
Address 502 Fourth Natl. Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Courtney B. Davis, Inc. (employee of owner) or (owner & operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) COURTNEY B. DAVIS, INC.  
502 Fourth Natl. Bank Bldg., Wichita, Kansas.  
(Address) Asst. Secy.

SUBSCRIBED AND SWORN to before me this 2 day of November, 1937

My commission expires March 16, 1939 Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY  
 Union National Bank Bldg., Wichita, Kansas.

C. B. DAVIS.  
 Steckel No. 2

SEC. 1 T. 20 R. 11W.  
 NE NW SE

Total Depth, 3320.  
 Comm. 11-23-35 Comp. 12-21-35.  
 Shot or Treated.  
 Contractor. Rose Spring Drilling Co.  
 Issued, 2-15-36.

County. Barton.

CASING.

7" 3278'

Production. DRY.

Figures Indicate Bottom of Formations.

sand	72
shale	130
red rock and shells	475
shale and shells	815
salt	1025
shale and shells	1275
broken lime	1330
shale and shells	1455
lime	1520
broken lime	1545
lime	1600
shells and shale	1760
lime	1890
shale and shells	1980
shale and shells	2220
shale	2350
lime	2690
broken lime	2740
lime	2965
broken lime	3036
lime	3278
show oil	3290
Inc in oil	3298-3300
lime	3320 Total Depth.

shot 3285-3308  
 400' fluid after shot.  
 cleaned out. Bailed twice gt  $\frac{1}{2}$  wtr. and  $\frac{1}{4}$  oil