

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Barton

County. Sec 1 Twp. 20 Rge. (E) 11 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW $\frac{1}{4}$ SE $\frac{1}{4}$

Lease Owner. C.B. Davis, Inc

Lease Name. Stacked Well No. 11

Office Address. 412 Union Natl Bank Bldg - Wichita Kan.

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed. 1-26-38 19

Application for plugging filed. 9-18-46 19

Application for plugging approved. 9-19-46 19

Plugging commenced. 9-22-46 19

Plugging completed. 9-30-46 19

Reason for abandonment of well or producing formation. depleted.

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes.

Name of Conservation Agent who supervised plugging of this well. Mr. Kerr - St. Bend Kas.

Producing formation. Artificial Depth to top. 3266 Bottom. 3279 Total Depth of Well 3279 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface				12 1/2"	100'	none
oil string				7"	3266'	2234' 10"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Having wells plug was set at 3214' - Filled hole w/ wh. chat & Rock to 3100' (6' below perforations) cemented from 3100' to 3075' -
Pulled out 36 gts - then filled hole w/ mud - finished pulling 7" + Set Rock bridge 10' below bottom of surface pipe - filled w/ Rock + cement up to 20' in sur. pipe + capped off top of surface w/ 8 day cement -



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to _____

Address _____


STATE OF Kansas, COUNTY OF Reno, ss.

H. M. Walker (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walker. Dowell Servicing Co.

P.O. Box #313 Hutchinson Kas. H. M. Walker
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of October 1946

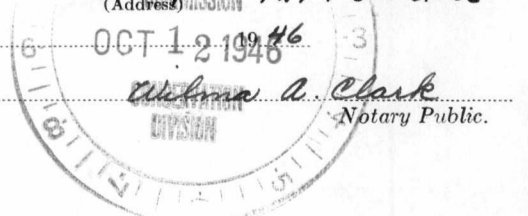

My commission expires Nov. 16, 1949.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bank Bldg., Wichita, Kansas

C. B. Davis, Inc.
Steckel No. 11

SEC. 1 T. 20 R. 11W.
SWc SE

Total Depth. 3279
Comm. 1-5-38 Comp. 1-26-38
Shot or Treated.
Contractor. Springrose Drlg. Co.
Issued. 3-5-38

County Barton.

Casing.

12 1/2" 100' 7" 3266'

Elevation

Production. Pot. 10 B. Per hour.

Figures Indicate Bottom of Formations.

sand and clay	85
shale and lime	100
lime shells	300
sand shale shells	362
shale red rock and lime shells	550
shale lime shells	940
shale salt shells	1010
shale and shells	1230
shale	1260
broken lime	1505
lime	1582
broken lime	1630
broken sand & lime	1670
shale lime shells	1790
broken lime	2055
shale lime shells	2265
shale and lime	2355
broken lime	2410
shale lime shells	2500
broken lime	2550
shale	2610
lime	2765
broken lime	2825
lime	2865
broken lime	2920
shale	3015
lime and shale	3060
lime	3090
lime soft	3100
lime	3140
shale and lime	3230
broken lime	3266
lime	3269
lime show oil	3274
lime	3279

Total Depth.

Perf. at 3106, Dry - no water or fluid.
Layne Wells Plug set at about 3274 - wh. 1500# Pressure

PLUGGING
FILE SEC 1 20 11W
BOOK PAGE 72 27

3214
3106
108



BOND
WATERFINE

HUTCHINSON

RAG CONTENT

2334-8 5/8
 3274-2" 77"
 1399
 2334-8 5/8
 3274-2" 77"
 1399
 2334-8 5/8
 3274-2" 77"
 1399

PLEASE PRINT OR TYPE FULL NAME AND ADDRESS

Subscription for J. O. B. Tel. Cont.

HUTCHINSON
 BOND
 RAG CONTENT
 74

THE HUTCHINSON BOND COMPANY
 100 BROADWAY - NEW YORK 10001