


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rice County. Sec. 13 Twp. 20S Rge. 10 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
260' S & 30' W of C NW SE NE
Lease Owner Sohio Petroleum Company
Lease Name Mantel Well No. 6
Office Address P.O. Box 30, Casper, Wyoming 82602
Character of Well (Completed as Oil, Gas or Dry Hole) Oil

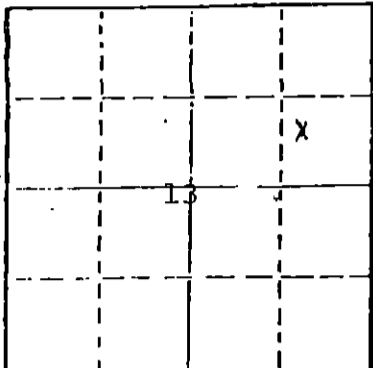

Locate well correctly on above
Section Plat

Date Well completed September 9, 1980
Application for plugging filed October 28, 1981
Application for plugging approved January 14, 1982
Plugging commenced March 25, 1982
Plugging completed April 2, 1982
Reason for abandonment of well or producing formation
Uneconomic to produce
If a producing well is abandoned, date of last production
September 22, 1981

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman
Producing formation Arbuckle Depth to top 3316 Bottom 3325 Total Depth of Well 3359
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil	3316	3325	8-5/8"	310'	-
				5 1/2"	3358'	67 jts, 2715'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Rigged up Kelso and sanded back to 3300'. Spot 5 sx. cement plug from 3300' - 3255'. Took stretch test and shot pipe at 2717'. Pulled 67 joints of 5 1/2" casing. State plugger, Mr. Gilbert Toman, on location. Pumped down 8-5/8" casing with 4 sx. hulls, 25 sx. gel, and 100 sx. 50-50 poz. Pump in at 450#. Initial shut in pressure - 250#. Cement plug from 2700' - 2350'. Well P&A at 1:00 PM, 4-2-82.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kelso Casing Pulling

STATE OF Wyoming COUNTY OF Natrona, ss.
W.H. Ward, Sohio Petroleum Company (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W.H. Ward

SUBSCRIBED AND SWORN TO before me this 20th day of April, 1982

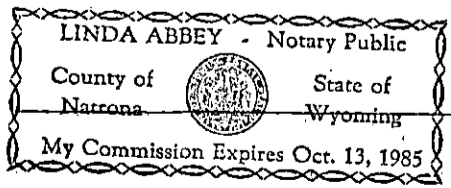

(Address) Linda Abbey
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
APR 21 1982
CONSERVATION DIVISION
Wichita, Kansas