
15.009.07305.0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

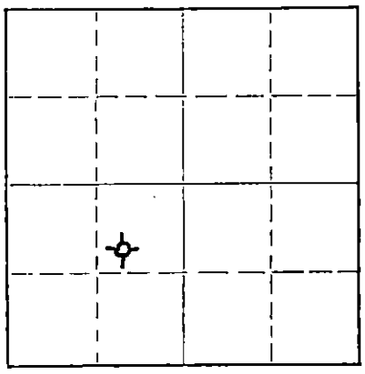

Locate well correctly on above Section Plat

Barton County. Sec. 34 Twp. 20S Rge. ___ (E) 12 (W)

Location as "NE/CNW¼SW¼" or footage from lines CSW - NE - SW

Lease Owner Champlin Oil & Refining Co.

Lease Name Foelgner Well No. 3

Office Address Box 308, Ellinwood, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed September 5 19 51

Application for plugging filed May 3 19 62

Application for plugging approved May 4 19 62

Plugging commenced May 18 19 62

Plugging completed May 23 19 62

Reason for abandonment of well or producing formation Oil depleted

If a producing well is abandoned, date of last production June 19 56

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation Arbuckle Depth to top 3390' Bottom 3453' Total Depth of Well 3453 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	226'	None
				5½" OD	3391'	2626'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ___ feet to ___ feet for each plug set.

Filled hole with sand from 3453' T.D. to 3380' and dumped in 5 sacks of cement then pumped in 30 barrels of mud and 80 sacks of cement filling hole to bottom of cellar.

RECEIVED
STATE CORPORATION COMMISSION
MAY 25 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pullers, Inc.

Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

J. W. Meyers (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J W Meyers

Box 308, Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of May, 19 62

M. Kenneth Elson
Notary Public.

My commission expires 5-22-66

15.009.07305.0000

Champlin Oil & Refining Co.
Foelgner # 3
SW/4- NE/4- SW/4 34-20S-12W
Barton County, Kansas

Formation Log

0'	- 227'	Surface sand and shale
227'	- 635'	Redbed and shale
635'	-1013'	Redbed, shale & shells
1013'	-1280'	Shale, shells & salt
1280'	-1473'	Shale & shells
1473'	-1608'	Shale, salt & lime streaks
1608'	- 1740'	Lime & shale
1740'	-1977'	Shale & lime
1977'	-2269'	Lime & shale
2269'	-2380'	Shale & lime
2380'	-3388'	Lime & shale
3388'	-3429'	Lime
3429'		Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAY 4 1962
CONSERVATION DIVISION
Wichita, Kansas