


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
890 Bitting Building
Wichita, Kansas

Rice County, Sec. 9 Twp. 18 Rge. 8W (E) (W)

Location as "NE/CNW%SW%" or footage from lines SE NE NE
Lease Owner Dozier Oil Company
Lease Name Schill Well No. 4
Office Address 1307 Union Nat'l. Bank - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed February 6, 1955
Application for plugging filed January 11, 1955
Application for plugging approved January 12, 1955
Plugging commenced January 15 19 55
Plugging completed January 19 19 55
Reason for abandonment of well or producing formation

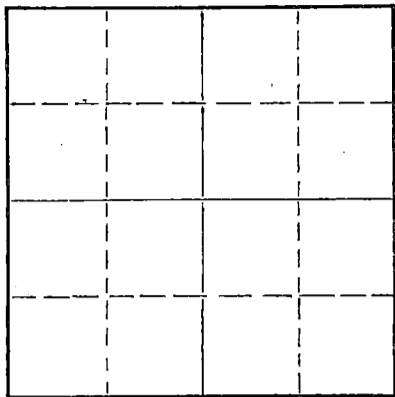

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well 3355 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	225'	None
				5-1/2"	3354'	2411'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was plugged back to 3000' and casing was perforated from 2886' to 2694'. Filled the hole with sand from 3000' to 2880' and ran 6 sacks of cement. Mudded hole to 230', set a 10' rock bridge and ran 15 sacks of cement. Mudded hole to 15' and ran 5 sacks of cement on top. Plugging completed.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Co., Inc.
Address Chase, Kansas

STATE OF Kansas COUNTY OF Sedgewick, ss.
R. M. Beck, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. M. Beck, Jr.
1307 Union National Bank Bldg, Wichita 2 (Address)

SUBSCRIBED AND SWORN TO before me this 26th day of January, 1955

Virginia Van Meter Notary Public.

My commission expires November 19, 1958

PLUGGING
FILE SEC 9 T 18 R 8W
BOOK PAGE 20 LINE 26

RECEIVED
STATE CORPORATION COMMISSION
JAN 27 1955
CONSERVATION DIVISION 1-27-1955
Wichita, Kansas


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- DOZIER OIL COMPANY
Farm- Schill No. 4

SEC. 9 T. 18 R. 8W
SE NE NE

Total Depth. 3354'
Comm. 1-27-54 Comp. 2-6-54
Shot or Treated.
Contractor. Lewis Drilling Company
Issued. 4-10-54

County Rice
KANSAS



CASING:
8 5/8" 225'
5 1/2" 3354'

Elevation. 1771'

Production. 43 B & 10% wtr.

Figures indicate Bottom of Formations.

sand & shale	150
blue shale & shells	225
shale & shells	395
anhydrite	415
red bed & shale	835
shale & shells	1500
lime & shale	2630
lime	2715
lime & shale	2880
lime	3235
sandy shale	3270
lime	3320
arbuckle	3354
Total Depth.	

Tops:
Lansing 2861
Arbuckle 3292

PLUGGING
WELL SEC. 9 T. 18 R. 8W
BOOK PAGE 90 LINE 26