


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800. King Building
Wichita, Kansas

NORTH

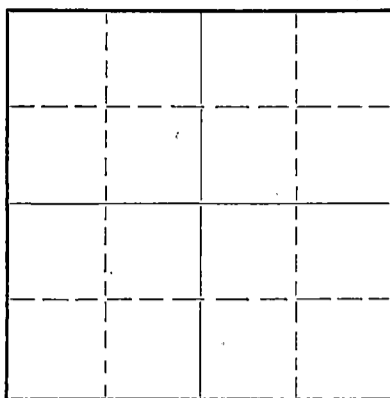

Locate well correctly on above
Section Plat

Rice County, Sec. 9 Twp. 18 Rge. 8 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NE SE
Lease Owner Dozier Oil Company.
Lease Name Schill Well No. A-1
Office Address Union National Bank Building, Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-24-52 19
Application for plugging filed 1-24-52 19
Application for plugging approved 1-24-52 19
Plugging commenced 1-24-52 19
Plugging completed 1-25-52 19
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top 3288 Bottom 3288 Total Depth of Well 3288 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	208	8-5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 210 feet to 30 feet for each plug set.

Used Halliburton plugs. Pushed to the depth of 210' cemented with 20-sacks cement cemented through drill pipe. Pushed top plug to 30-feet cemented with 5-sacks cement.

JAN 28 1952 1-28-1952

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Dozier Oil Company,
Address Union National Bank Building, Wichita, Kansas.

STATE OF Kansas, COUNTY OF Rice, ss.
Stag Drilling Inc., (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *C. L. O'Connell*

(Address)

SUBSCRIBED AND SWORN to before me this 26 day of Jan, 1952

Orlando Miller
Notary Public.

My commission expires 3/1/55



15.159.00069.00.00

CONTRACTOR'S WELL LOG

Operator Dozier Oil Co FARM NAME Schill Well No. A 1
Location _____ County Rice State Kansas
COMMENCEMENT DATE 1-15-52 COMPLETION DATE 1-24-52

LOG OF WELL

* All measurements from top of rotary bushing

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS
0	208	Surface soil		
208	390	Red bed, shale & shells		
390	410	Sandy lime		
410	825	Shale Shells	1/4° -505'	
825	1050	Salt		
1050	1390	Lime shale	1° -1235'	
1390	1500	Sandy lime		
1500	1850	Lime shale		
1850	2460	Shale Shells	1 1/2° -2150'	
2460	2775	Lime		
2775	2868	Sandy shale		
2868	3217	Lime		
3217	3260	Lime shale		
3260	3288	Congl.		
			Total Depth	Dry Hole

Set 208' (11 jts) 8 5/8" casing

STATE OF KANSAS)
SS
COUNTY OF RICE)

The undersigned certifies that to the best of his knowledge and belief the above facts are true and correct.

STAG DRILLING INC.,

BY C. L. O'Connell
President

Subscribed and sworn to before me this 26th day of January, 1952

My Commission Expires 3/1/55

Orlando Miller
Notary Public

JAN 28 1952

PLUGGING
FEB 9 1952
190 20