

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-165-21,487.00.00

LEASE NAME John K

WELL NUMBER 1-8

660 Ft. from S Section Line

1230 Ft. from E Section Line

SEC. 8 TWP. 18 RGE. 18 ~~EE~~or(W)

COUNTY Rush

Date Well Completed 8-18-89

Plugging Commenced 8-18-89

Plugging Completed 8-18-89

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Balcron Oil Company

ADDRESS P.O. Box 20174 Billings, Montana 58104

PHONE# (406) 259-7860 OPERATORS LICENSE NO. 3701

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 8-16-89 (date)

by Steve Peifer (KCC District Agent's Name).

Is ACO-1 filed? operator to be filed by operator If not, Is well log attached? yes

Producing Formation _____ Depth to Top _____ Bottom _____ T.D. 4250'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	Top	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Bottom Plug: @ 3897' w/40 sacks cement thru drill pipe

Next Plug: @ 1285' w/50 " " " " "

Next Plug: @ 640' w/50 " " " " "

Top Plug: @ 40' w/10 " " " " 15 sacks in Rat Hole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Duke Drilling Co., Inc. License No. 5929

Address P.O. Box 823 Great Bend, KS 67530

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Balcron Oil Company

STATE OF Kansas COUNTY OF Barton, ss.

Jay Schneider


(Employee of Operator) or ~~Operator~~ XXXXXXXXXX of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

RECEIVED
STATE CORPORATION COMMISSION
(Signature) [Signature]

(Address) P.O. Box 823 Great Bend, KS 67530

AND SWORN TO before me this 23 day of August, 1989



Wichita, Kansas
Dorothy M. Hagbie
Notary Public

My Commission Expires: 5-5-90

15.165.21487.00.00

DRILLER'S WELL LOG

DATE COMMENCED: August 11, 1989
DATE COMPLETED: August 18, 1989

Balcron Oil Company
JOHN 'K' 1-8
90' E of C S/2 Se
Sec. 8, T18S, R18W
Rush County, Ks.

0 - 1925' Surface Soil, Sand, Shale
1925 - 2255' Lime & Shale
2255 - 2495' Shale & Lime
2495 - 3880' Lime & shale
3880 - 4140' Dolomite
4140 - 4250' Sand, Fellspar, Quartz, Mica
4250' RTD


ELEVATION: 2085 K.B.

Surface Pipe: Set new
8-5/8", 24# pipe @ 1017'
w/375 sacks 60/40 pozmix
2% gel 3% cc.


A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss

Jay Schneider of lawful age does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

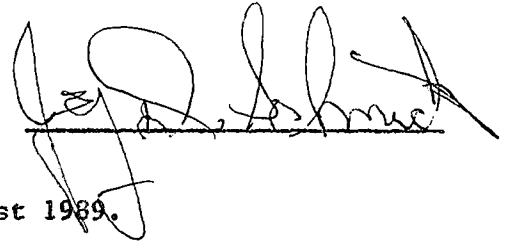

Subscribed and sworn to before me this 23 day of August 1989.

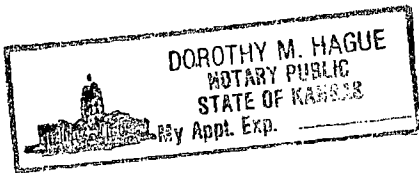

Dorothy M. Hague
Notary Public

RECEIVED
STATE OF KANSAS COMMISSION

AUG 24 1989

CONSULT WITH THE STATE
WELL LOG COMMISSION