


15.159.00661.00.00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above  
Section Plat

Rice County, Sec. 9 Twp. 19S Rge. (E) 8 (W)  
Location as "NE/CNW/SW" or footage from lines C NW NE  
Lease Owner Richard G. Smith  
Lease Name Burfield Well No. 1  
Office Address 227 Beacon Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed September 2 1964  
Application for plugging filed September 2 1964  
Application for plugging approved September 2 1964  
Plugging commenced September 2 1964  
Plugging completed September 2 1964  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation None Depth to top - Bottom - Total Depth of Well 3535 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Sand-Clay	0	325	8 5/8"	347	None
Anhydrite		325				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Filled hole with heavy mud
- Halliburton plug @ 335, 1 sack hulls and 20 sacks cement mixed through the drill pipe
- Filled with mud to 40 feet
- 1/2 sack hulls, 1 sack dry cement with plug pushed down on top; 10 sacks cement on plug
- Bridged rat hole with 2 sacks cement


RECEIVED  
STATE CORPORATION COMMISSION

SEP 14 1964

9-14-1964  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Ja-Le Contracting, Inc.  
Address Box 562, Lyons, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Richard G. Smith, (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Richard G. Smith  
Richard G. Smith  
227 Beacon Building, Wichita, Kansas  
(Address)

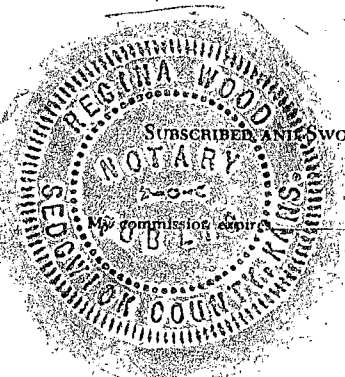

Subscribed and sworn to before me this 3rd day of September, 1964  
9-16-64  
Regina Wood  
Notary Public.

DRILLERS' LOG

OPERATOR: Richard G. Smith - Ja-Le Contracting, Inc.  
 227 Beacon Building Box 562  
 Wichita, Kansas Lyons, Kansas

LOCATION: Burfield No. 1  
 C NW NE Section 9, Township 19 South, Range 8 West  
 Rice County, Kansas

CASING RECORD: 8 5/8" @ 347 feet (used) - cemented with 225 sacks

ELEVATION: 1731 Derrick Floor  
 1733 Kelly Bushing  
 1729 Ground Level

CONTRACTOR: Ja-Le Contracting, Inc.  
 Box 562  
 Lyons, Kansas

COMMENCED: August 23, 1964

COMPLETED: September 2, 1964

TOTAL DEPTH: 3535 feet

PRODUCTION: Completed as: DRY HOLE, September 2, 1964

RECEIVED  
 STATE CORPORATION COMMISSION  
 SEP 14 1964  
 CONSERVATION DIVISION  
 Wichita, Kansas

LOG

(Measurements from top of Rotary Bushing to bottom of formation by driller)

Soil, clay & sand	0-325	Shale	3267
Anhydrite	365	Sand	3273
Shale, lime & sand	1415	Shale	3346
Lime & shale	2500	Dolomitic Shale (Maquoketa)	3400
Shale	2530	Dolomite (Viola)	3444
Lime (shale streaks)	2731	Shale & sand (Simpson)	3504
Shale (Heebner)	2736	Dolomite (Arbuckle)	3535
Sand & shale	2896	RTD	3535
Lime (shale streaks) (Lansing-Kansas City)	3248		

The undersigned, Richard G. Smith, hereby certifies that the above log is a true and correct log of the formations encountered during drilling the above well as reflected by the daily drilling reports.

*Richard G. Smith*  
 Richard G. Smith

STATE OF KANSAS )  
 COUNTY OF SEDGWICK ) SS

Before me, the undersigned, a Notary Public, within and for said County and State, on this 8th day of September, 1964, personally appeared Richard G. Smith to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

*Regina Wood*  
 Notary Public

Commission Expires: 9-16-64

