

R

## DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
 Conservation Division  
 800 Bitting Building  
 Wichita, Kansas


FILE NO. 83-16LOCATION SW-SE-NWSEC. 26 TWP. 20 RGE. 14-WDry Hole  Abandoned Oil Well  Abandoned Gas Well 

I have today completed supervision of plugging of:

Well No. 1 Lease JanusOperator The Bay Petroleum Co Address Box #513 - Chase - KansasField 1 County BarberTotal Depth 3540 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8 - 825 ft. Circulated with cement  
 15% casing set at 3540 ft. Mudded. 5 sacks of cement  
 on the bottom of hole. Shot off & pulled the 6 1/2" casing.  
 Filled with mud to 250 ft. Set rock bridge & 15 sacks  
 of cement at 250 ft. Mud to 38 ft. Plug & 10 sacks  
 of cement at the surface.  
 Bob Mullins - Plugging Contractor

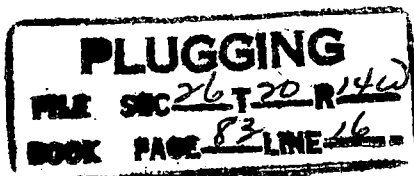

MAR 29 1949  
 C. M. Steadman  
 District Conservation Agent  
 KANSAS  
 Date 3-25-49