

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-097-21496-00-00  
Spot: SWSWSW Sec/Twnshp/Rge: 21-30S-18W  
330 feet from S Section Line, 4840 feet from E Section Line  
Lease/Unit Name: SMITH-COBB Well Number: 1  
County: KIOWA Total Vertical Depth: 5130 feet

Operator License No.: 8061  
Op Name: OIL PRODUCERS, INC. OF KANSAS  
Address: PO BOX 8647  
WICHITA, KS 67208

Production Casing Size: 4.5 feet: 5293 WITH 200 SX CMT  
Surface Casing Size: 8.625 feet: 734 WITH 175 SX CMT

166<sup>73</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/16/2003 1:45 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: CIBP @ 4900' & 3350' WITH 2 SX CMT. PLUG AT 1100' WITH 15 SX GEL & 50 SX CMT. PLUG AT 760' WITH 50 SX CMT. PLUG AT 300' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 10/16/2003 3:00 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:


PBTD 3510'. PERFS AT 3400-01 & 3489-93'. CIBP @ 3510'. PERFS AT 4951-54'. SANDED BACK TO 3350' & PUT 4 SX CMT ON TOP OF SAND BRIDGE. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 1100' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 760' WITH 50 SX CMT. 3RD PLUG AT 300' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT.

RECEIVED  
OCT 22 2003  
KCC WICHITA  
10-22-2003

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2820' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

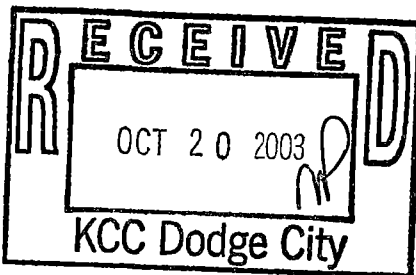

Signed

Stephen J. Pfeifer  
(TECHNICIAN)

INVOICED

DATE 10-22-03

INV. NO. 2004060656

Form CP 2/3