


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

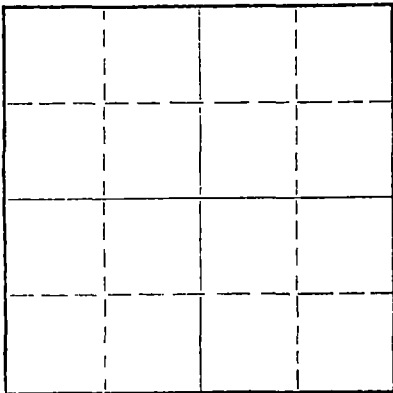

Locate well correctly on above  
Section Plat

Rice County County. Sec 9 Twp. 18S Rge.        (E) 7 (W)  
Location as "NE/CNWxSWx" or footage from lines SW NW NW  
Lease Owner John C. Graves etal  
Lease Name Gray Well No. 1  
Office Address 505 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 10-22-70 19         
Application for plugging filed " 19         
Application for plugging approved " 19         
Plugging commenced " 19         
Plugging completed " 19         
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production        19         
Was permission obtained from the Conservation Division or its agents before plugging was commenced?       

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation        Depth to top        Bottom        Total Depth of Well        Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	234.05'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from        feet to        feet for each plug set.

Mudded to 235' with 1/2 sack hulls plug 25 sacks cement to 40'  
with 1/2 sacks hulls.  
10 sacks cement and 2 sacks in rathole


RECEIVED  
STATE CORPORATION COMMISSION  
NOV 3 1970  
CONSERVATION DIVISION  
Wichita, Kansas  
11-3-1970

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Graves Drilling Co., Inc.  
Address 505 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.  
John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) John C. Graves  
505 Union Center, Wichita, Ks. (Address)

SUBSCRIBED AND SWORN TO before me this 2 day of November, 19 70

My commission expires July 28, 1974  
Mary Ann Scott  
Mary Ann Scott Notary Public.



15.159.20336.00 RECEIVED  
STATE CORPORATION COMMISSION  
NOV 6 1970  
CONSERVATION DIVISION  
Wichita, Kansas

ROTARY DRILLERS' LOG

OPERATOR: John C. Graves etal COMMENCED: 10-15-70  
505 Union Center  
Wichita, Kansas

CONTRACTOR: Graves Drilling Co., Inc. COMPLETED: 10-22-70  
505 Union Center  
Wichita, Kansas

SURFACE CASING: 8 joints 8 5/8" casing LOCATION: GRAY # 1  
set at 240' with 180 SW NW NW  
sacks of cement. Sec. 9-18S-7W  
Rice County, Ks.

-----

0	-	240	shale
240	-	640	Shale & shells
640	-	1006	shale & shells
1006	-	2759	lime & shale
2759	-	3016	lime
3016	-	3120	lime & shale
3120	-	3145	shale
3145	-	3206	sand
3206	-	3228	lime & shale
3228	-	3262	sand & shale
3262	-	3265	shale
3265	-	3290	shale

The above is correct to the best of my knowledge.

GRAVES DRILLING CO., INC.



By John C. Graves  
John C. Graves, Pres.

Mary Ann Scott  
Mary Ann Scott, Notary Public