

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rice County. Sec. 25 Twp. 18S Rge. (E) 6 (W)

Location as "NE/CNW%SW%" or footage from lines NW NW NW

Lease Owner Greenland Drilling Company

Lease Name Root Well No. 1

Office Address 506 Union Natl. Bank Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 5/3 1956

Application for plugging filed 5/3 1956

Application for plugging approved 5/3 1956


Plugging commenced 5/3 1956

Plugging completed 5/3 1956

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

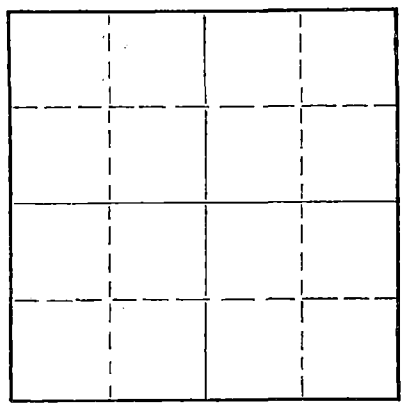

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well _____

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3522 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	155'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug and 15 sacks cement @ 150'
Plug and 5 sacks cement @ 15'

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Greenland Drilling Company
Address 506 Union National Bank Bldg., Wichita, 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Richard S. Davis, Vice-President (employee of owner) o&c (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
506 Union National Bank Bldg., Wichita Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of May, 19 56

My commission expires March 15, 1960

[Signature]
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

MAY 8X 1956 5-8-1956
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 25 T 18 R 6W
BOOK PAGE 59 LINE 24

GREENLAND DRILLING CO.

WELL LOG

Company: GREENLAND DRILLING COMPANY

Sec. 25 Twp. 18S Rge 6W

Farm: ROOT

No. 1

Location: NW NW NW

Rice County, Kansas

Commenced: 4-23-56

Completed: 5-3-56

Total Depth: 3522

Contractor: GREENLAND DRILLING COMPANY

Casing: 8-5/8" 155'
5-1/2" ---

Elevation: 1678 RB

Production: D&A

Figures Indicate Bottom of Formations

155	Shale & shells	TOPS:	
215	Red bed	Heebner	2680
260	Shale & shells	Toronto	2723
285	Shale & sand	Douglas Sand	2749
725	Shale & shells	Douglas Shale	2760
800	Shale & shells w/salt	Brown Lime	2830
935	Shells & shale	Lansing	2861
1095	Lime & shale	Conglomerate	3356
1200	Shale & sandy lime	Mississippi	3494
1315	Shale & sand	TD	3522
1425	Shale & lime		
1545	Lime & shale		
1760	Shale & lime		
2105	Sandy shale & lime		
2420	Shale & lime		
2503	Lime & shale		
2525	Shale & lime		
2661	Lime & shale		
2772	Sand & shale w/lime streaks		
2856	Shale w/lime streaks		
3030	Lime & shale		
3141	Lime		
3179	Lime & shale		
3247	Lime		
3310	Lime & shale		
3356	Shale & lime		
3382	Conglomerate		
3421	Shale, lime & chert		
3495	Conglomerate		
3522	Chert & lime		
3522	RTD		


STATE OF KANSAS, COUNTY OF SEDGWICK, ss:


I, Richard S. Davis, of the Greenland Drilling Company, upon oath state that the above and foregoing is a true and correct copy of the log of the #1 Root well.


Richard S. Davis, Vice-President

Subscribed and sworn to before me this 7th day of May, 1956.

My commission expires March 15, 1960.


Verdina B. Rutledge, Notary Public



VED
COMMISSION
MAY 9 1956
CONSERVATION DIVISION
Winning Kansas