

State of Kansas



JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
245 North Water
WICHITA, KANSAS 67202

June 19, 1981

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

Dear Sir:

Mr. Roy Goans of Allen Drilling Company has this
date requested permission to plug the following described well:

Operator's Full Name: R-B Petroleum

Complete Address: P.O. Box 1065, Great Bend, Kansas 67530

Lease Name: Sellers Farm Well No. 1

Location: NE NE NE Sec. 25 Twp. 18 Rge. 7 (E) (W)

County: Rice Total Depth: 3350'

Abandoned Oil Well Gas Well Input Well SWD Well D&A

Other well as hereafter indicated: OWWO

Mr. Goans was instructed to plug the well as follows:

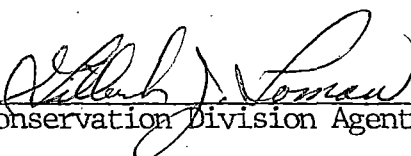
8-5/8"-260'-Circ. Circulate hole and fill with mud. Pump 50 sacks 50-50

Pozmix with 4 % gel and 3% cal chloride through drill pipe at 300'.

Fill hole with mud to 40'. Push plug and 1/2 sack hulls to 40' and cap

hole with 10 sacks cement. Cement rahole with 5 sacks cement.

Very truly yours,


Conservation Division Agent