


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

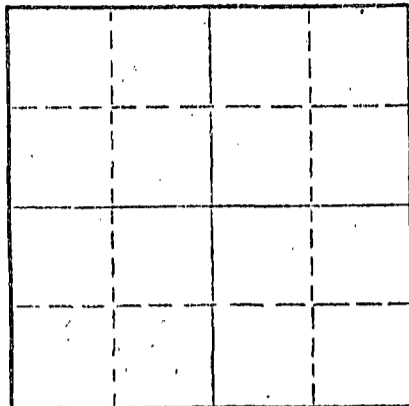

Locate well correctly on above
Section Plat

Rice County, Sec. 20 Twp. 18S Rge. 8W (E) (W)
Location as "NE/CNW/SW" or footage from lines SW SW
Lease Owner J. O. Farmer
Lease Name Baldwin "B" Well No. 1
Office Address 379 W. Wichita - Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed May 21, 1967
Application for plugging filed May 21, 1967
Application for plugging approved May 21, 1967
Plugging commenced May 21, 1967
Plugging completed May 21, 1967
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman.
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3475 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	223'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole w/mud to 220'.
Set plug w/1/2 sx hulls &
25 sx cement. Mud to 40'.
Set plug w/1/2 sx hulls.
Cement to base of cellar.
25 sx cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION

MAY 26 1967

CONSERVATION DIVISION
Wichita, Kansas
5-26-1967

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza - Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Maxine V. Starr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr
1720 Wichita Plaza - Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of May, 1967

Betty M. Maloney Notary Public

DRILLERS LOG

Baldwin "B" No. 1

CASING RECORD:	COMPANY:	J. O. Farmer	DESCRIPTION:
8 5/8" @ 223'	CONTRACTOR:	Red Tiger Drilling Co.	SW SW
w/175 sx cement	COMMENCED:	May 14, 1967	20-18S-8W
	COMPLETED:	May 21, 1967	Rice Co., Ks.
			ELEVATION:

TOTAL DEPTH: 3475'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil	0	70	
Clay & Shale	70	95	
Pyrite	95	99	
Hard White Sand & Shale	99	224	
Shale, Red Bed, Pyrite & Sand Stone	224	352	
Anhydrite	352	368	
Shale	368	685	
Shale, Shells & Salt	685	1106	
Lime & Shale	1106	2464	
Lime	2464	2734	
Heebner	2734	2738	
Shale	2738	2770	
Sand, Douglas	2770	2875	
Lime & Shale	2875	2893	
K. C. Lime	2893	2990	
Lime	2990	3150	
Lime & Shale	3150	3132	
Shale, Maq.	3132	3300	
Lime & Shale	3300	3425	
Arbuckle	3425	3475	

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 26 1967
 CONSERVATION DIVISION
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Maxine V. Starr
 Maxine V. Starr

Subscribed and sworn to before me this 23rd day of May, 1967.

Betty M. Maloney
 Notary Public

My Commission Expires:

3-22-71