


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

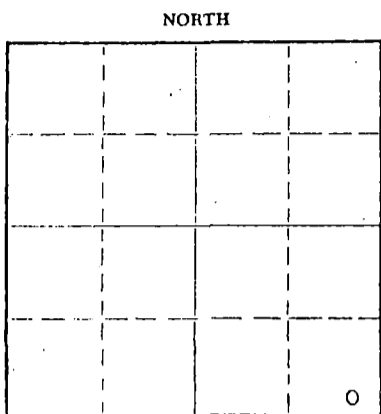

Locate well correctly on above  
Section Plat

Rice County, Sec. 25 Twp. 18S Rge. (E) 9 (W)  
Location as "NE/CNWxSWx" or footage from lines: SE SE SE  
Lease Owner: R. G. Smith & H. A. Stoskopf  
Lease Name: Barker Well No. 1  
Office Address: 602 Rule Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole  
Date well completed: November 30 19 66  
Application for plugging filed: November 30 19 66  
Application for plugging approved: November 30 19 66  
Plugging commenced: November 30 19 66  
Plugging completed: November 30 19 66  
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Gilbert Toman, Holyrood, Kansas  
Producing formation: Depth to top: Bottom: Total Depth of Well: Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Soil, clay & sand	water	0	204	8 5/8	204	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Filled hole to 195 feet with heavy mud  
Spotted plug, 1/4 sack hulls with 20 sacks cement displaced through the drillpipe  
Filled hole to 40 feet with heavy mud  
Spotted plug, 1/2 sack hulls with 10 sacks cement  
Spotted 2 sacks cement in rat hole

RECEIVED  
DEC 5 1966  
CONSERVATION DIVISION  
12-5-1966

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor: Burt Drilling Company  
Address: 1823 Washington, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Richard G. Smith (Employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Richard G. Smith  
602 Rule Building, Wichita, Kansas (Address)

Subscribed and sworn to before me this 2nd day of December, 19 66  
My commission expires July 2, 1970  
Jo Ann Guest Notary Public



R. G. SMITH  
602 Rule Building  
Wichita, Kansas

Well: Barker No. 1  
Commenced R. D.: 11/21/66  
Completed R. D.: 11/30/66  
Total Depth: 3506' D. F.  
Casing: Ran 206' of 8 5/8 8rd thd.  
Surface Pipe

Sec.: 25-18-9W  
Rice County, Kansas  
Elevation:  
Initial Prod.: D & A  
Contractor: BURT DRILLING  
COMPANY

Strata	Depth
Shale & Gypsum	0- 125'
Blue Shale	125- 204
Shale & Shell	204- 245
Redbed	245- 300
Shale & Shells	300- 372
Anhydrite	372- 390
Shale & Shale	390-1148
Lime & Shale	1148-1215
Lime & Shale Streaks	1215-1280
Lime	1280-1447
Lime & Shale	1447-1800
Shale w/Lime Streaks	1800-1865
Shale & Lime Streaks	1865-2104
Shale & Lime	2104-2415
Lime w/Shale Streaks	2415-2470
Lime & Shale Streaks	2470-2474
Lime	2474-2539
Lime & Shale	2539-2631
Lime (Top 2605')	2631-2695
Lime	2695-2748
Heebner Shale	2748-2751
Lime	2751-2758
Shale	2758-2767
Lime & Shale	2767-2864
Shale	2864-2877
Brown Lime	2877-2906
Lansing Lime	2906-2945
Lime	2945-3251
Lime & Shale	3251-3308
Shale w/Chert	3308-3317
Lime (Viola)	3317-3359
Lime	3359-3385
Lime & Shale	3385-3406
Arbuckle	3406-3506


RECEIVED  
OIL & GAS CONSERVATION COMMISSION  
DEC 5 1966  
CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify that the above is a true and correct log of said well as reflected by daily reports.

BURT DRILLING CO.



Signed and sworn in my presence this 30th day of November, 1966.



My Commission Expires: Oct 15, 1967