


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

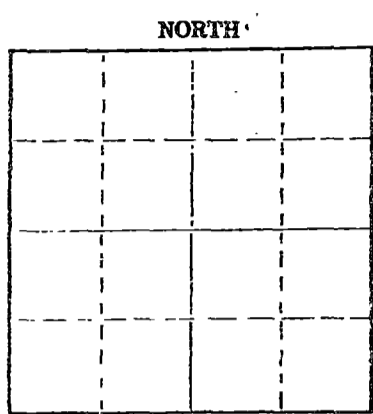

Rice County. Sec. 36 Twp. 19S Rge. 9W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C S/2 NW/4  
Lease Owner MAPCO, Inc.  
Lease Name Daenzer Well No. 1  
Office Address 1437 South Boulder Avenue, Tulsa, Oklahoma 74119  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed January 24 19 75  
Application for plugging filed January 24 19 75  
Application for plugging approved January 24 19 75  
Plugging commenced January 24 19 75  
Plugging completed January 24 19 75  
Reason for abandonment of well or producing formation D & A  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 220' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	256.34'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 280'. Spot 35 sx. cmt.  
Mud to 40', 1/2 sk. hulls, cmt. to  
bottom of cellar w/10 sx. cmt.  
2 sx. cmt. in rathole.

RECEIVED  
STATE CORPORATION COMMISSION

JAN 31 1975

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Red Tiger Drilling Company  
Address 1720 Wichita Plaza, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick  
Linda H. Dickens (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda H. Dickens  
1720 Wichita Plaza, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 29th day of January 19 75

My commission expires December 28, 1977  
D'Ann Drennan  
Notary Public.



DRILLERS LOG

No. 1 Daenzer

CASING RECORD:	COMPANY:	MAPCO, Inc.	DESCRIPTION:
8-5/8" @ 256.34' w/225 sx. cmt.	CONTRACTOR:	Red Tiger Drilling Co.	C S/2 NW/4 36-19S-9W Rice County, Kansas
TOTAL DEPTH: 2200'	COMMENCED:	1-19-75	
	COMPLETED:	1-24-75	

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Shale	0	180	
Shale & Redbed	180	258	
Redbed	258	325	
Shale	325	1280	
Lime & Shale	1280	1490	
Shale & Lime	1490	2000	
Shale, Lime & Sand	2000	2200	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens  
Linda H. Dickens

Subscribed and sworn to before me this 29th day of January, 1975.

Diana Drennan  
Notary Public

My Commission Expires:

December 28, 1977

