


WELL PLUGGING RECORD

STATE OF KANSAS STATE CORPORATION COMMISSION Give All Information Completely Make Required Affidavit Mail or Deliver Report to: Conservation Division State Corporation Commission 212 No. Market Wichita, Kansas 67202 NORTH

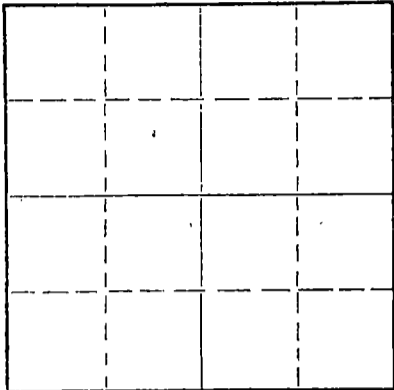

Locate well correctly on above Section Plat

Barton County, Sec. 33 Twp. 20 Rge. 14 (W) Location as "NE/CNW*SW*" or footage from lines SE NE SW Lease Owner NATIONAL COOPERATIVE REFINERY ASSOCIATION Lease Name McGreevy "A" Well No. 2 Office Address P. O. Box 6, Great Bend, Kansas 67530 Character of Well (completed as Oil, Gas or Dry Hole) Oil Date well completed October 3, 1951 Application for plugging filed February 1, 1972 Application for plugging approved February 8, 1972 Plugging commenced February 18, 1972 Plugging completed February 18, 1972 Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production October 23, 1970 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan Producing formation Lansing & Arbuckle Depth to top 3295' Bottom 3574' Total Depth of Well 3574' Feet PBTB 3494'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Contains two rows of casing data.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Move in. Rig up. Shot casing @ 2600'. Pull 2598' - 5 1/2" casing. Sand back from 3494' to 3275'. Dump 5 sxs. cement to 3250', mud to 500', rock bridge to 480'. Dump 7 yds. Ready Mix to surface. Complete 12:00 noon, 2-18-72.

RECEIVED STATE CORPORATION COMMISSION MAR 2 1972 CONSERVATION DIVISION Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Comstock Pipe Pulling, Inc. Address 320 North Part, Stafford, Kansas 67578

STATE OF KANSAS, COUNTY OF BARTON, ss. I. J. Gotsche (employee of owner) or (owner or operator) of the above-described

well being duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) I. J. Gotsche, District Superintendent P. O. Box 6, Great Bend, Kansas 67530 (Address)



Subscribed and sworn to before me this 1 st. day of March, 19 72

Russell E. Turnbow Notary Public.

Company: TOM PALMER
Farm: McGreevy "A"


No. 2

SEC. 33 T. 20
SE NE SW

R. 11W

Total Depth. 3572
Comm. 9-13-51 Date. 10-3-51
Shot or Treated.
Contractor. The Palmer Oil Corp.
Issued. 10-27-51

County Barton
KANSAS



CASING:

8 5/8" 832' cem w/810 sxs.
5 1/2" 3568' cem w/90 sxs.

Elevation. 1913 RB

Production. 423 bbls. phy.

Figures indicate Bottom of Formations.

sand, shale	315
shale, shells	413
sand	450
shale	650
shale, shells	828
anhydrite	849
shale, red bed	1010
shale, shells	1636
lime, shale	3110
lime	3206
lime, shale	3306
lime	3568
Arbuckle li e	3569 RTD
Arbuckle lime	3572
Total depth	

Tops: RB	
Heebner	3182
Brown lime	3284
Lansing	3295
Sandy Conglomerate	3542
Simpson	Trace
Arbuckle	3568

DST 3408-3460, tool open 17
minutes-rec. 130' of oil & gas
cut mud.

RECEIVED
STATE CORPORATION COMMISSION
FEB 7 1972
CONSERVATION DIVISION
Wichita, Kansas